
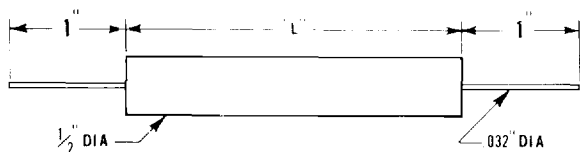


EDAL

SERIES
L

SILICON HIGH VOLTAGE CARTRIDGE



"L" is equal to 1/8 inch per KV plus 3/4" for half wave circuit.

ELECTRICAL RATINGS

FOR HALF WAVE CIRCUIT

Maximum Allowable DC Output Current:	
at 25°C ambient temperature,	1 amp
at 100°C ambient temperature,	750 mA
at 150°C ambient temperature,	250 mA
Maximum Allowable One Cycle Surge Current:	
(60 cps single phase non-recurrent, at rated PRV and no load)	60 amps
Maximum Full Load Forward Voltage Drop Per KV:	
(150°C full cycle average)	.5 volt
Maximum Reverse Current	
(150°C full cycle average)	.5 mA
Storage Temperature	-65°C to 150°C
Ambient Operating Temperature	-65°C to 150°C

■ Series L high voltage silicon rectifiers are designed for applications requiring minimum size combined with maximum power. The half-wave configuration consists of matched, pre-tested, pre-selected double diffused avalanche rectifiers offering self-protection against voltage transients. Faster assembly by eliminating the need of soldering many diodes to achieve equivalent circuitry is a decided economy made possible by axial leads that facilitate point-to-point circuit soldering. These compact packages, offering long life and a high degree of reliability, meet rigid environmental conditions. Half-wave circuits in voltage ratings from 1500 to 30,000 volts PIV. Currents range from 20 mA to 1 amp. Special types available on request.

SERIES L SPECIFICATIONS

CURRENT (TENS OF mA)	SERIES DESIGNATION	PIV (HUNDREDS OF VOLTS)
20 mA to 1 amp	L	1500 to 30,000 volts

25

L

15

First number represents current in tens of milliamps, second is series designation, third PIV in hundreds of volts. 25 L 15, for example, signifies 250 mA, Series L, 1500 volts PIV.

EDALS008

EDAL INDUSTRIES, INC.

4 SHORT BEACH ROAD • EAST HAVEN, CONN. 06512

Area Code 203 467-2591

March 1986
Printed in U.S.A.