


塑封肖特基二极管  
反向电压 20 ~ 40 V  
正向电流 1.0 A

Schottky Barrier Plastic Rectifiers  
Reverse Voltage 20 ~ 40 V  
Forward Current 1.0 A

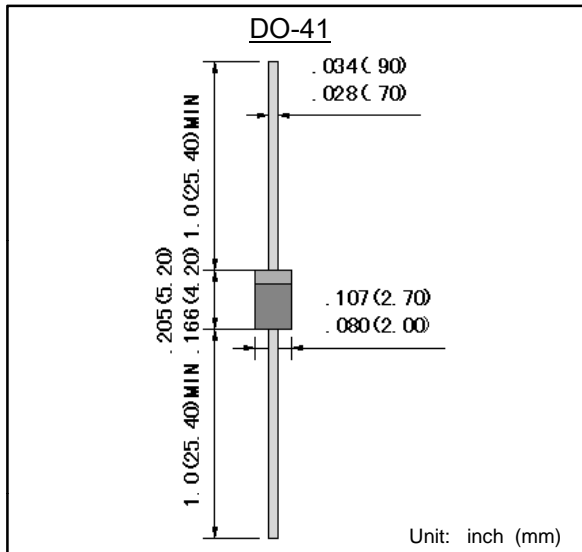

### 特征 Features

- 反向漏电流低 Low reverse leakage
- 正向浪涌承受能力强 High forward surge capability
- 高信赖性 High reliability
- 高温焊接保证 High temperature soldering guaranteed:  
260°C/10 秒, 引线长度:0.375" (9.5mm)  
260°C/10seconds,9.5mm lead length
- 引线 and 管体皆符合RoHS标准  
Lead and body according with RoHS standard
- 型号后缀“-F”标记无卤素产品  
Green compound with suffix "-F" on Marking

### 机械数据 Mechanical Data

- 封装外形:DO-41 塑封 Case:DO-41 Molded plastic
- 环氧树脂 : UL易燃等级 : 94V-0  
Epoxy: UL 94V-0 rate flame retardant
- 引脚 : 镀锡,无铅 Lead: Pure tin plated, lead free

**最大值和特性** TA = 25°C 除非另有规定。

**Maximum Ratings & Characteristics** Ratings at 25°C ambient temperature unless otherwise specified.

参数 Parameter	符号 Symbols	1N5817	1N5818	1N5819	单位 Unit
最大可重复峰值反向电压 Maximum repetitive peak reverse voltage	$V_{RRM}$	20	30	40	V
最大均方根电压 Maximum RMS voltage	$V_{RMS}$	14	21	28	V
最大直流阻断电压 Maximum DC blocking voltage	$V_{DC}$	20	30	40	V
最大正向平均整流电流 Maximum average forward rectified current	$I_{F(AV)}$	1.0			A
正向不重复浪涌电流 8.3 ms单一正弦半波 Non-repetitive peak forward surge current 8.3 ms singlehalf sine-wave	$I_{FSM}$	30			A
最大正向电压 @IF=1.0A Maximum forward voltage	$V_F$	0.45	0.55	0.60	V
最大反向电流 @V <sub>DC</sub> Maximum reverse current	$I_R$	500			μA
		20			mA
典型热阻 Typical thermal resistance (Note 1)	$R_{\theta JA}$	60			°C/W
典型结电容 VR=4.0V,f=1MHz Type junction capacitance	$C_j$	110			pF
工作结温 Operating junction	$T_j$	-55 --- +125			°C
存储温度 Storage temperature rang	TSTG	-55 --- +150			°C

备注 Note:


1) 引线长度 0.375" (9.5 mm) , 安装在PCB板上 , 从PN结到周围环境的热阻。

1) Thermal resistance from junction to ambient at 0.375" (9.5 mm) lead length, PCB mounted.

## 特性曲线 Characteristic Curves


正向特性曲线 (典型值)

TYPICAL FORWARD CHARACTERISTIC

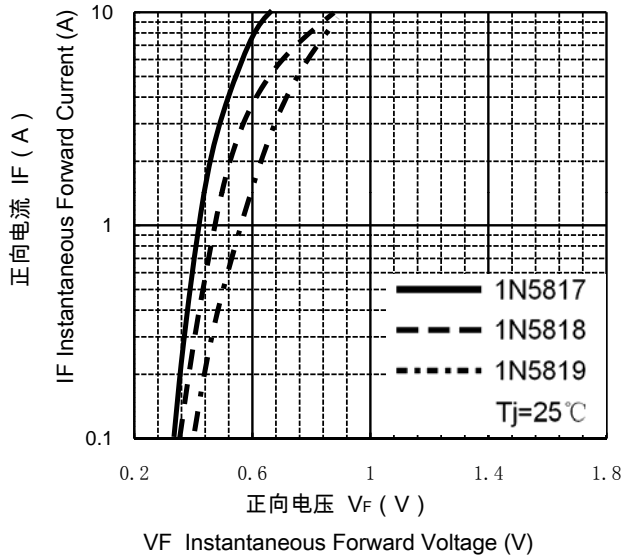


正向电流降额曲线

FORWARD CURRENT DERATING CURVE

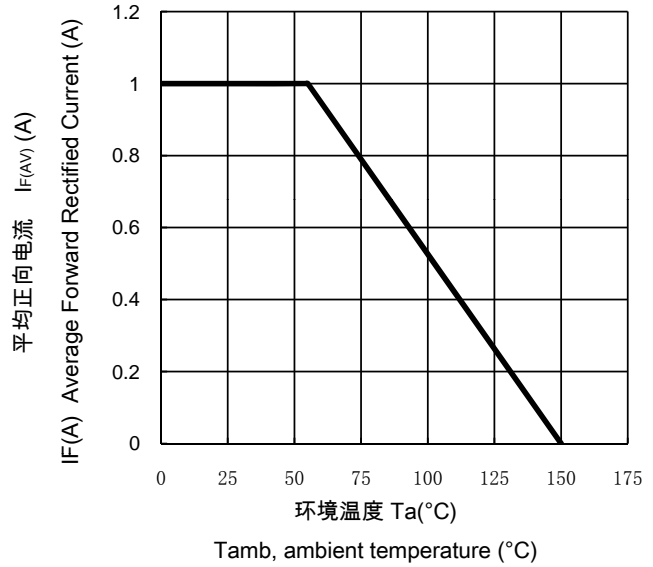

浪涌特性曲线 (最大值)

MAXIMUM NON REPETITIVE  
PEAK FORWARD SURGE CURRENT

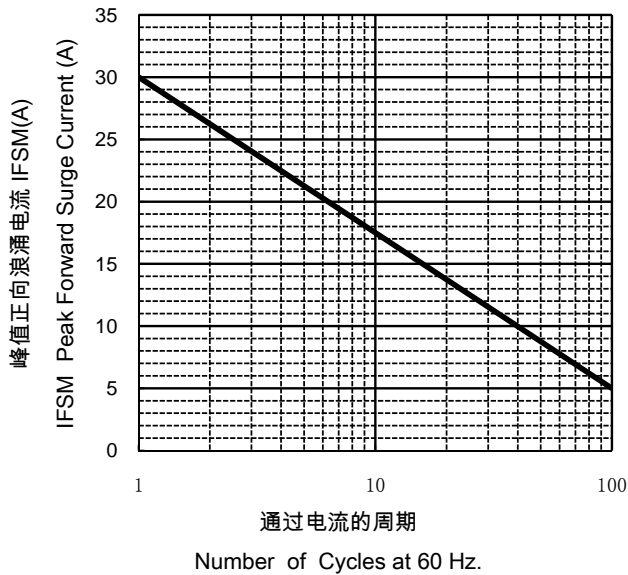

反向特性曲线

Typical Reverse Characteristics

