

RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free


**FEATURES**

- High DC Current Gain
- Complementary Pair with 2SC5344

TO-92


**CLASSIFICATION OF  $h_{FE}$**

Product-Rank	2SA1981-O	2SA1981-Y
Range	100~200	160~320

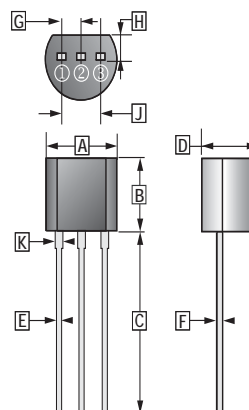

① Emitter  
② Collector  
③ Base

REF.	Millimeter	
	Min.	Max.
A	4.40	4.70
B	4.30	4.70
C	12.70	-
D	3.30	3.81
E	0.36	0.56
F	0.36	0.51
G	1.27 TYP.	
H	1.10	-
J	2.42	2.66
K	0.36	0.76



**ABSOLUTE MAXIMUM RATINGS** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	$V_{CBO}$	-35	V
Collector to Emitter Voltage	$V_{CEO}$	-30	V
Emitter to Base Voltage	$V_{EBO}$	-5	V
Collector Current - Continuous	$I_C$	-0.8	A
Collector Power Dissipation	$P_C$	625	mW
Thermal Resistance From Junction to Ambient	$R_{\theta JA}$	200	$^\circ\text{C} / \text{W}$
Junction, Storage Temperature	$T_J, T_{STG}$	150, -55~150	$^\circ\text{C}$

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Min	Typ	Max	Unit	Test condition
Collector to Base Breakdown Voltage	$V_{(BR)CBO}$	-35	-	-	V	$I_C = -0.5\text{mA}, I_E = 0$
Collector to Emitter Breakdown Voltage	$V_{(BR)CEO}$	-30	-	-	V	$I_C = -1\text{mA}, I_B = 0$
Emitter to Base Breakdown Voltage	$V_{(BR)EBO}$	-5	-	-	V	$I_E = -0.05\text{mA}, I_C = 0$
Collector Cut-Off Current	$I_{CBO}$	-	-	-0.1	$\mu\text{A}$	$V_{CB} = -35\text{V}, I_E = 0$
Emitter Cut-Off Current	$I_{EBO}$	-	-	-0.1	$\mu\text{A}$	$V_{EB} = -5\text{V}, I_C = 0$
DC Current Gain	$h_{FE}$	100	-	320		$V_{CE} = -1\text{V}, I_C = -0.1\text{A}$
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	-	-	-0.5	V	$I_C = -0.5\text{A}, I_B = -20\text{mA}$
Transition Frequency	$f_T$	-	120	-	MHz	$V_{CE} = -5\text{V}, I_C = -10\text{mA}$
Collector Output Capacitance	$C_{ob}$	-	19	-	pF	$V_{CB} = -10\text{V}, I_E = 0, f = 1\text{MHz}$