



807DCR2R3SEK

Radial lead, high energy
Parts are RoHS compliant

ELECTRICAL SPECIFICATIONS

Capacitance: 800 F

Temperature Range: -25°C to +70°C

ESR (AC): 10 milliOhms Max at 20°C and 1 kHz

ESR (DC): 15 milliOhms Max at 20°C and DC

Tolerance: -20 % , +50 %

WVDC: 2.3 Volts DC

SVDC: 2.5 Volts DC

Weight: 73.54 grams

Maximum stored energy: 587.7778 Watt hours

Volume: 67.348 ml

Maximum Current: 70.77 Amps (1 second discharge to 1/2 the rated voltage)

Operating Current: 54.12 Amps (5 sec discharge to 1/2 rated voltage)

Leakage Current: 7.2 mA after 72 hours

Specific Energy:

Specific Power:

Gravimetric Density: 7.9926 Wh/kg

Volumetric Density: 8.7275 Wh/l

Gravimetric Density: 0.5755 kW/kg

Volumetric Density: 0.6284 kW/l

Load Life: 1000 hours at 70°C with 100% of rated voltage applied

Max Capacitance Change: ≤30% of initially measured value

ESR Change: ≤200% of maximum specified value

PHYSICAL DIMENSIONS

Diameter (D): 35 mm, +/- 1 mm

Length (L): 70 mm, +/- 2 mm

Height (H): mm, +/- mm


Thickness (T): mm, +/- mm

Termination Finish: Matte Tin

Lead Spacing (S): 10 mm, +/-0.5 mm

Lead Diameter (d): mm, +/-0.5 mm

Lead Length (LL): 4mm, +/- 1 mm

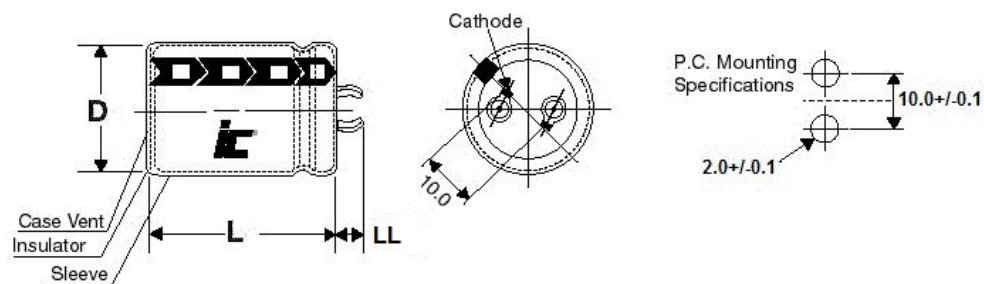

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.illcap.com.hk
© Copyright 2017 Illinois Capacitor. A division of Cornell Dublier, All Rights Reserved