

# 30Watts Single Output External Adapter

## ADE-300X series

### Feature:

- 90 to 264Vac universal input range.
- UL/CUL,TUV,CE,CB safety meet.
- EMI/RFI meet VDE & FCC limit B.
- Low cost & compact size.
- 30 watts in 120.5×61×35.5 mm size.
- 2 Year Warranty.

### Specifications: typical at nominal line, full load at 25°C.

Input Specifications:	General Specifications:
<b>Input voltage:</b> 90 to 264Vac	<b>Efficiency:</b> 70% typical at full load
<b>Input Frequency:</b> 47 Hz to 63Hz	<b>Hold-up time:</b> 10ms @ 115Vac full load
<b>Input inrush current:</b> 20A at 115Vac 40A at 230Vac	<b>EMI/RFI:</b> VDE & FCC Class B limits
<b>Earth leakage:</b> 0.2mA max @ 115Vac 0.4mA max @ 230Vac	<b>Dielectric Withstand:</b> Input/output: 3000Vac Input/Ground: 1500Vac
<b>Output Specifications:</b>	★ <b>Safety Meet:</b> UL/CUL UL60950 TUV EN60950 CE N55022&EN50082-1 CB IEC950
<b>Output Rating:</b> See selection table	
<b>Output Voltage Accuracy :</b> ± 5% max.	
<b>Line Regulation:</b> ± 1% max.	<b>Switching frequency:</b> 50kHz(reference)
<b>Load Regulation:</b> ± 5% max. (Full to half load)	<b>Weight:</b> 300g
<b>Transient Response:</b> ± 1% max.dev. (Full to half load) 500uS recovery	<b>MTBF:</b> 100,000hours(MIL-HDBK-217F)
<b>Temperature Coefficient:</b> ± 0.04% / °C	<b>Environmental Specifications:</b>
<b>Ripple &amp; Noise:</b> 1% P-P max.	<b>Operating temperature:</b> 0 to +40°C
<b>Protections:</b> a. Over voltage protection b. Over power protection c. Short circuit protection	<b>Storage temperature:</b> -20 to +85°C
	<b>Humidity:</b> 5 to 95 % RH non-condensing
	<b>Vibration:</b> 2.4G , 5 to 500Hz
	<b>Cooling:</b> Free air convection

Note:

1. Vibration test: Three orthogonal axes, random vibration, 10 minutes for each axis.
2. Maximum output power is 30W.
3. At least 20% of load is required to obtain stable regulation.
4. Ripple & noise test method is measured at output terminal across a 0.1uF ceramic cap & a 10uF tantalum or electrolytic cap in parallel with a 20MHz bandwidth oscilloscope directly.

★ Please refer the safety approval status on appendix 1, For latest safety approval status Please consult YCL or visit" [www.ycl.com.tw](http://www.ycl.com.tw)

# 30Watts Single Output External Adapter

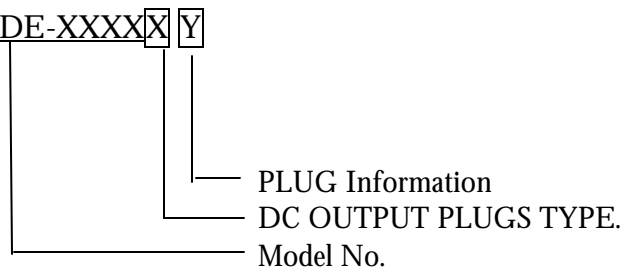
## ADE-300X series

### Model Selection Table:

Model No.	Output Voltage	Output Current Minimum	Output Current Maximum	Max. Power
ADE-3001	5V	0mA	6000mA	30W
ADE-3002	12V	0mA	2500mA	30W
ADE-3003	15V	0mA	2000mA	30W









#### Note:

□ Order information: ADE-XXXXX<sup>X</sup><sup>Y</sup>



□ Others output voltage or output cord versions are available. Please consult factory for details.

### DC OUTPUT PLUGS

PF : Plug S-Female  A	PLF: Plug L-Female  B	PM : Plug S-Male  C	PLM: Plug L-Male  D
PGS: Plug EIAJ RC-5320  E	PGL: Plug L-EIAJ RC-5320  F	PFI: Plug S-Female I shape  G	PLFI: Plug L-Female I shape  H

# 30Watts Single Output External Adapter **YCL**

## ADE-300X series

**Dimensions:** mm  $\pm 1.0$ mm

