


Small Signal Product
200mW, PNP Small Signal Transistor
FEATURES

- Epitaxial planar die construction
- Surface mount device type
- Moisture sensitivity level 1
- Matte Tin(Sn) lead finish with Nickel(Ni) underplate
- Pb free and RoHS compliant
- Green compound (Halogen free) with suffix "G" on packing code and prefix "G" on date code


MECHANICAL DATA

- Case: SOT- 323 small outline plastic package
- Terminal: Matte tin plated, lead free, solderable per MIL-STD-202, Method 208 guaranteed
- High temperature soldering guaranteed: 260°C/10s
- Weight: 0.005 grams (approximately)

SOT-323

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power Dissipation	P_D	200	mW
Collector-Base Voltage	V_{CBO}	50	V
Collector-Emitter Voltage	V_{CEO}	45	V
Emitter-Base Voltage	V_{EBO}	5	V
Collector Current	I_C	0.5	A
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	625	K/W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150	$^\circ\text{C}$

Notes: 1. Transistor mounted on a FR4 printed-circuit board

PARAMETER	SYMBOL	MIN	MAX	UNIT
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	50	-	V
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	45	-	V
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	5	-	V
Collector Cut-off Current	I_{CBO}	-	100	nA
Emitter Cut-off Current	I_{EBO}	-	100	nA
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	-	0.7	V
Transition Frequency	f_T	100	-	MHz
DC Current Gain	h_{FE}	at $V_{CE} = 1\text{ V}, I_C = 100\text{ mA}$	100	250
		-16W	160	400
		-25W	250	600
		-40W	40	
		at $V_{CE} = 1\text{ V}, I_C = 500\text{ mA}$		

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

Fig.1 Total Power Dissipation $P_{tot} = f(T_S)$

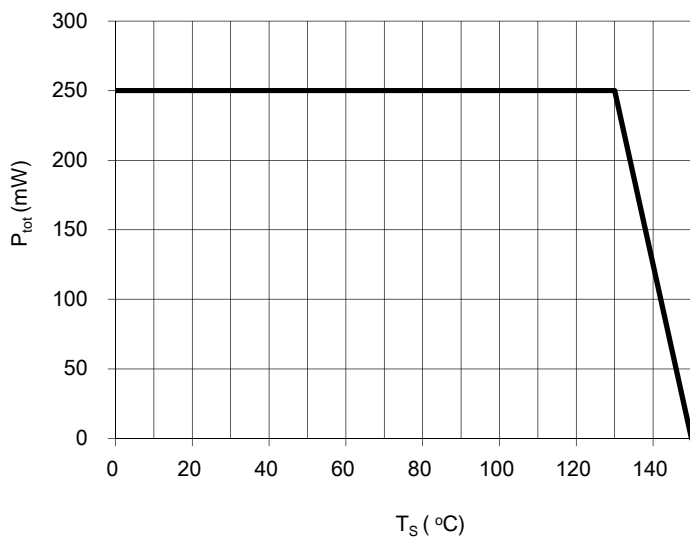


Fig.2 Permissible Pulse Load $R_{\theta JA} = f(tp)$

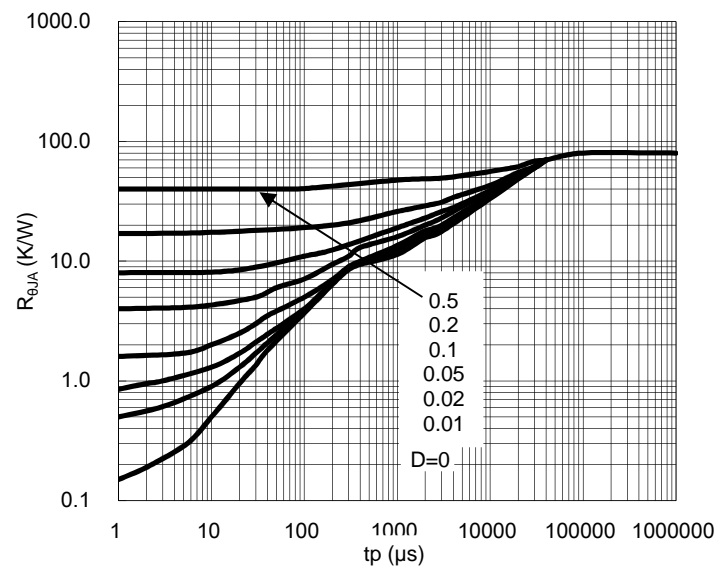


Fig.3 Permissible Pulse Load $P_{totmax} / P_{totDC} = f(tp)$


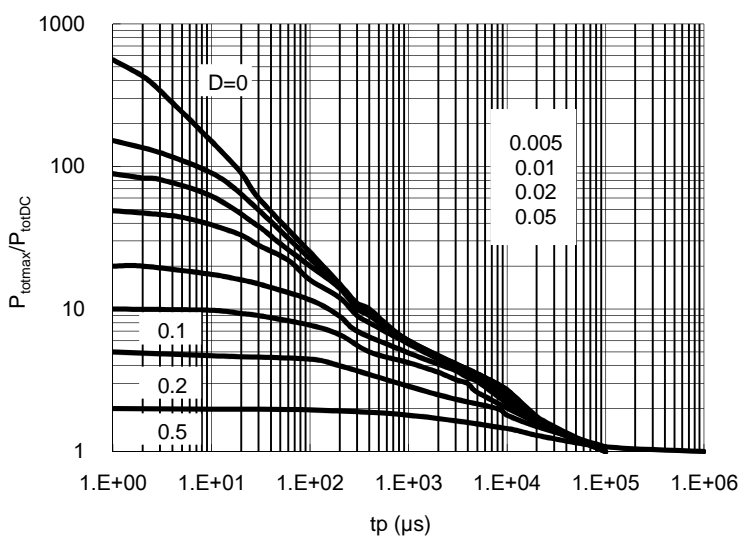


Fig. 4 Collector Cutoff Current $I_{CBO} = f(T_A)$
 $V_{CB}=25V$

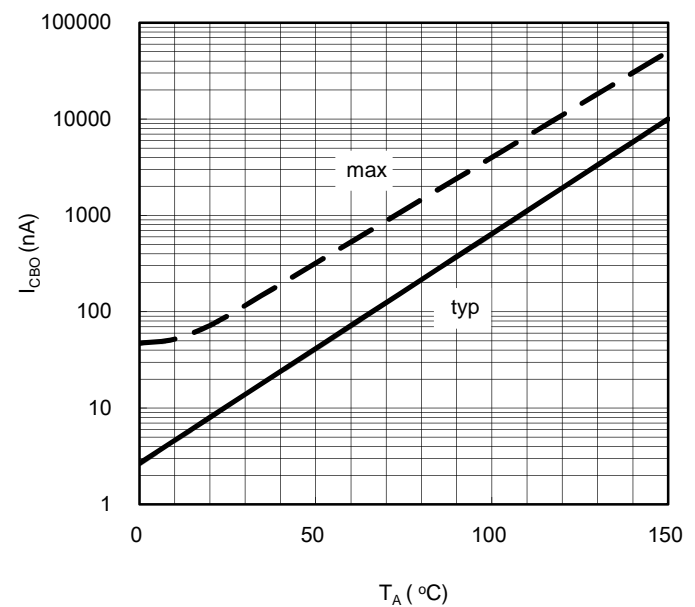

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

Fig.5 DC Current Gain $h_{FE} = f(I_C)$
 $V_{CE} = 1V$

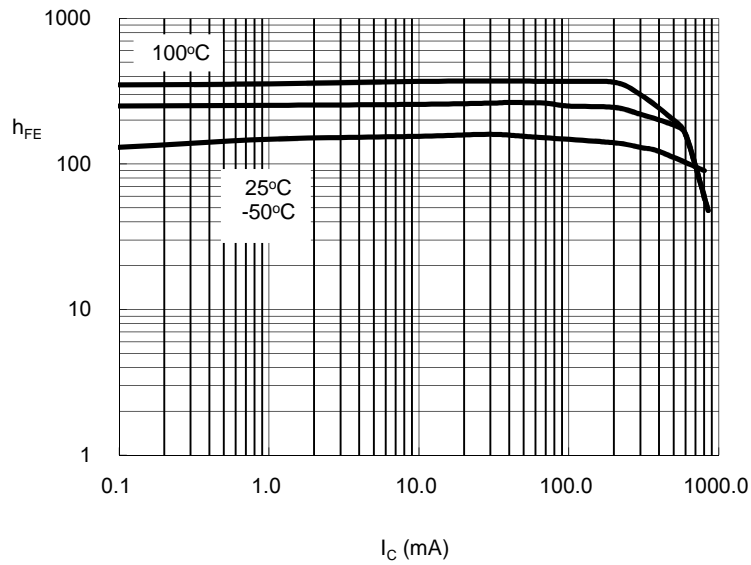


Fig. 6 Transition Frequency $f_T = f(I_C)$
 $V_{CE} = 5V$

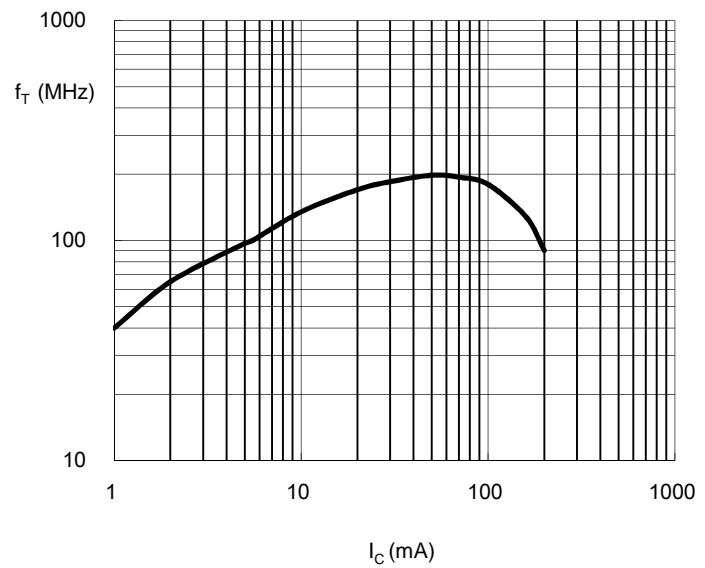


Fig. 7 Base-Emitter Saturation Voltage
 $I_C = f(V_{BEsat}), h_{FE} = 10$


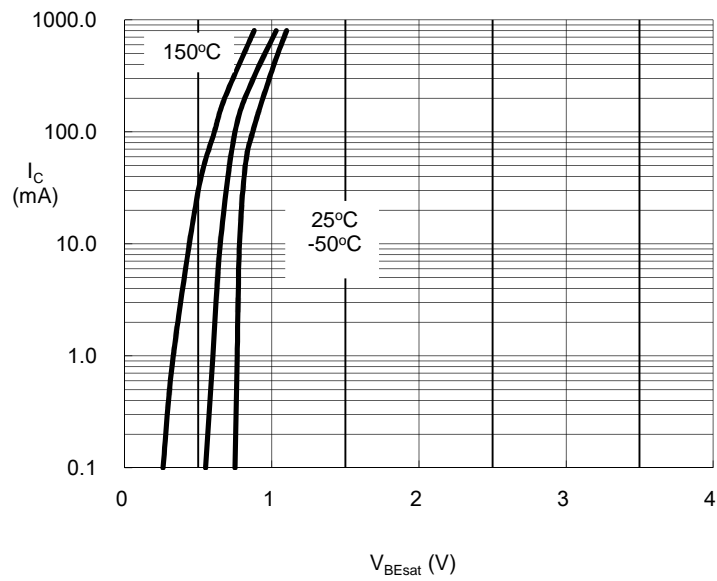


Fig. 8 Collector-Emitter Saturation Voltage

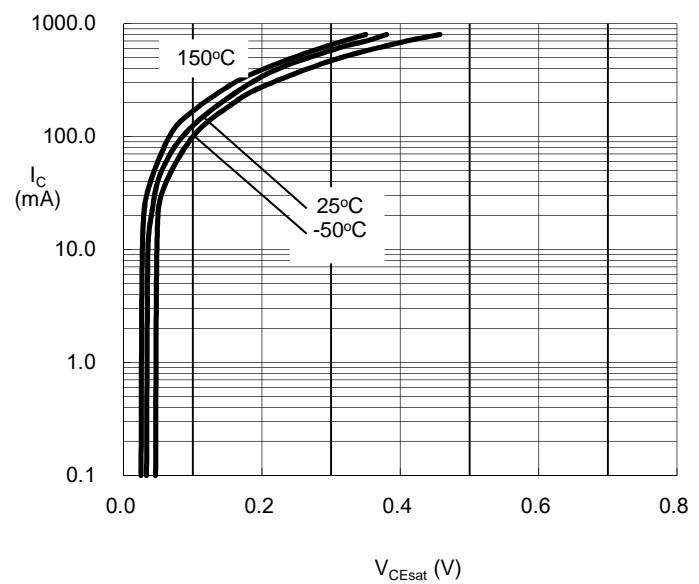

Small Signal Product


ORDERING INFORMATION						
PART NO.	MANUFACTURE CODE	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING	MARKING
BC817-16W	(Note)	RF	G	SOT-323	3K / 7" Reel	6CR
BC817-25W		RF	G	SOT-323	3K / 7" Reel	6CS
BC817-40W		RF	G	SOT-323	3K / 7" Reel	6CT

Note: Manufacture special control, if empty means no special control requirement.

EXAMPLE					
PREFERRED P/N	PART NO.	MANUFACTURE CODE	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
BC817-16W RFG	BC817-16W		RF	G	Green compound
BC817-16W-B0 RFG	BC817-16W	B0	RF	G	Green compound


Small Signal Product

DIMENSIONS

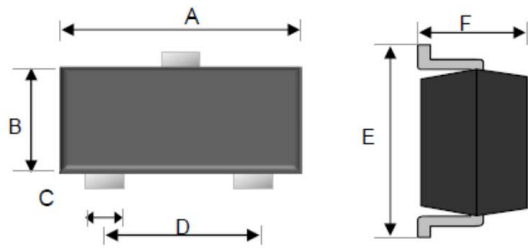

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
A	1.80	2.20	0.07	0.09
B	1.15	1.35	0.05	0.05
C	0.15	0.40	0.01	0.02
D	1.20	1.40	0.05	0.06
E	2.00	2.45	0.08	0.10
F	0.80	1.10	0.03	0.04

SUGGEST PAD LAYOUT



DIM.	Unit(mm)	Unit(inch)
	Typ.	Typ.
A	0.65	0.026
B	1.6	0.063
C	0.8	0.031
D	0.8	0.031

Small Signal Product**Notice**

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.