



C-2000™ Contactors & Starters Accessories

Front-Mount Auxiliary Contact Blocks

Front-mount auxiliary contact blocks clip onto front face of contactor. Contact Rating: A600, Q600.

| For Use With | Contact | Catalog Number | List Price, GO-10C2 |
|-------------------|---------|----------------|---------------------|
| All CL Contactors | 1 NO | BCLF10 | \$11.00 |
| | 1 NC | BCLF01 | 11.00 |
| | 1 NOⓄ | BCLF10G | 15.00 |
| | 1 NCⓄ | BCLF01G | 15.00 |

① Overlapping contacts


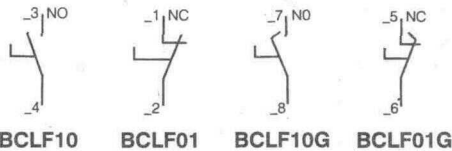


Side-Mount Auxiliary Contact Blocks

Side-mount auxiliary contact blocks can be mounted on either left or right sides of contactor. Positive displacement contacts are designed to prevent simultaneous closing of NO and NC contacts to avoid overlapping between opposing functions. Contact Rating: A600, Q600.

| For Use With | Type | Contact Arrangement | Catalog Number | List Price, GO-10C2 |
|----------------------|-------------|---------------------|----------------|---------------------|
| All CL/CK Contactors | Base Block | 1NO-1NC | BCLL11 | \$19.00 |
| | | 2NO | BCLL20 | 19.00 |
| | Adder Block | 1NO-1NC | BRLL11 | 19.00 |
| | | 2NO | BRLL20 | 19.00 |



① Overlapping contacts

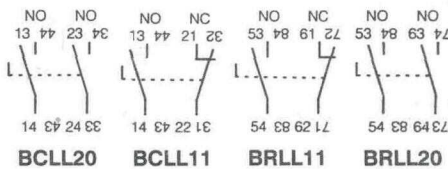

Mechanical Interlocks

Mechanical interlocks, used for horizontal interlocking of two contactors, prevent the closing of one contactor (as long as the other remains closed). BEL02 includes two built-in NC contacts. Contact Rating: A600, Q600.

| For Use With Two Contactors Mounted Side-By-Side | Catalog Number | List Price, GO-10C2 |
|--|----------------|---------------------|
| 5-75 Hp contactors (All CL Contactors) | BEL02 | \$35.00 |
| 100-500 Hp contactors (All CK Contactors) | BEKH | 65.00 |



Pneumatic Timer

Pneumatic timers are adjustable time-delayed auxiliary contacts. They come equipped with two time-delayed contacts: 1NO and 1NC, electrically separated. Setting is scaled over a 350° rotation by means of a knurled knob with timing guide marks. To mount a pneumatic timer, simply clip it on front face of contactor. Contact Rating: A600, Q600.

| For Use With | Type | Time Range | Contacts | Catalog Number | List Price, GO-10C2 |
|--|----------------|------------|----------|----------------|---------------------|
| 5-75 Hp contactors (All CL Contactors) | Time Delay On | .1-30 sec | 1NO-1NC | BTLF30C | \$120.00 |
| | | 1-60 sec | 1NO-1NC | BTLF60C | 120.00 |
| | Time Delay Off | .1-30 sec | 1NO-1NC | BTLF30D | 120.00 |
| | | 1-60 sec | 1NO-1NC | BTLF60D | 120.00 |

