

# 128K x 16 Static RAM

## Features

- **High Speed**
  - 55 ns and 70 ns availability
- **Low voltage range:**
  - 1.65V–1.95V
- **Pin Compatible with CY62136BV18**
- **Ultra-low active power**
  - Typical Active Current: 0.5 mA @ f = 1 MHz
  - Typical Active Current: 1.5 mA @ f = f<sub>max</sub> (70 ns speed)
- **Low standby power**
- **Easy memory expansion with  $\overline{CE}$  and  $\overline{OE}$  features**
- **Automatic power-down when deselected**
- **CMOS for optimum speed/power**

## Functional Description

The CY62136CV18 is a high-performance CMOS static RAM organized as 128K words by 16 bits. This device features advanced circuit design to provide ultra-low active current. This is ideal for providing More Battery Life® (MoBL™) in portable applications such as cellular telephones. The device also has

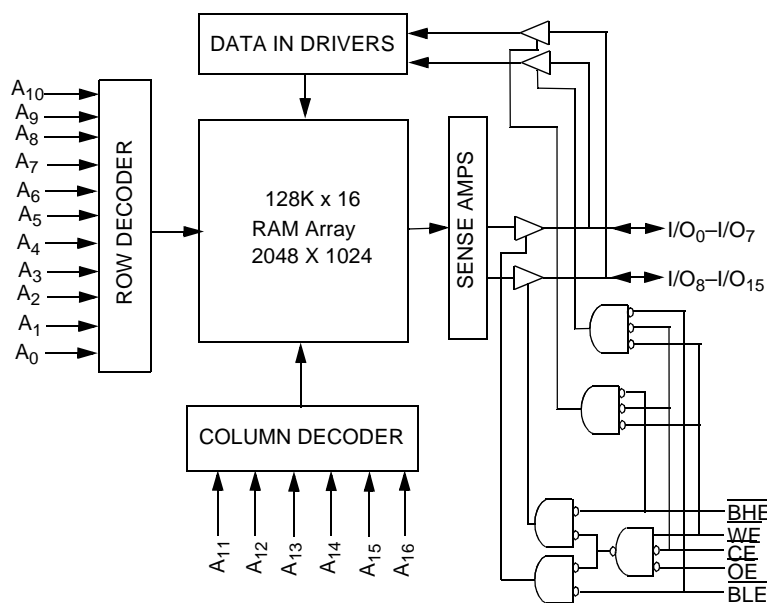
an automatic power-down feature that significantly reduces power consumption by 99% when addresses are not toggling. The device can also be put into standby mode when deselected ( $\overline{CE}$  HIGH). The input/output pins (I/O<sub>0</sub> through I/O<sub>15</sub>) are placed in a high-impedance state when: deselected ( $\overline{CE}$  HIGH), outputs are disabled ( $\overline{OE}$  HIGH), both Byte High Enable and Byte Low Enable are disabled ( $\overline{BHE}$ ,  $\overline{BLE}$  HIGH), or during a write operation ( $\overline{CE}$  LOW and  $\overline{WE}$  LOW).

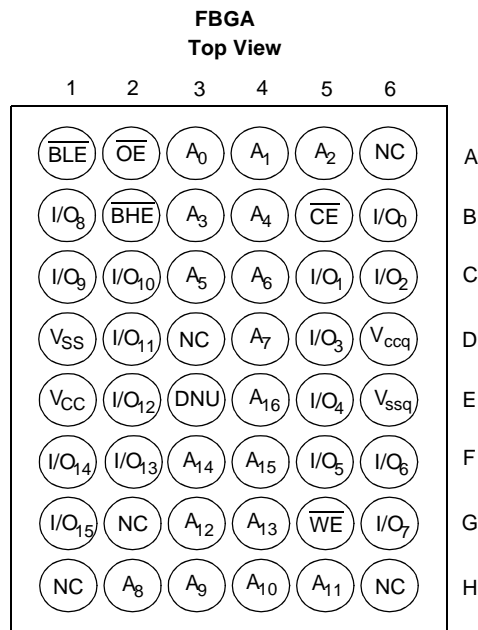
Writing to the device is accomplished by taking Chip Enable ( $\overline{CE}$ ) and Write Enable ( $\overline{WE}$ ) inputs LOW. If Byte Low Enable ( $\overline{BLE}$ ) is LOW, then data from I/O pins (I/O<sub>0</sub> through I/O<sub>7</sub>), is written into the location specified on the address pins (A<sub>0</sub> through A<sub>16</sub>). If Byte High Enable ( $\overline{BHE}$ ) is LOW, then data from I/O pins (I/O<sub>8</sub> through I/O<sub>15</sub>) is written into the location specified on the address pins (A<sub>0</sub> through A<sub>16</sub>).

Reading from the device is accomplished by taking Chip Enable ( $\overline{CE}$ ) and Output Enable ( $\overline{OE}$ ) LOW while forcing the Write Enable ( $\overline{WE}$ ) HIGH. If Byte Low Enable ( $\overline{BLE}$ ) is LOW, then data from the memory location specified by the address pins will appear on I/O<sub>0</sub> to I/O<sub>7</sub>. If Byte High Enable ( $\overline{BHE}$ ) is LOW, then data from memory will appear on I/O<sub>8</sub> to I/O<sub>15</sub>. See the Truth Table at the back of this data sheet for a complete description of read and write modes.

The CY62136CV18 is available in 48-ball FBGA packaging.

## Logic Block Diagram



**Pin Configuration<sup>[1, 2]</sup>**

**Maximum Ratings**

(Above which the useful life may be impaired. For user guidelines, not tested.)

Storage Temperature .....	-65°C to +150°C
Ambient Temperature with Power Applied.....	-55°C to +125°C
Supply Voltage to Ground Potential .....	-0.2V to +2.4V

**DC Voltage Applied to Outputs**

in High Z State <sup>[3]</sup> .....	-0.2V to $V_{CC} + 0.2V$
DC Input Voltage <sup>[3]</sup> .....	-0.2V to $V_{CC} + 0.2V$
Output Current into Outputs (LOW).....	20 mA
Static Discharge Voltage.....	>2001V (per MIL-STD-883, Method 3015)
Latch-Up Current.....	>200 mA

**Operating Range**

Device	Range	Ambient Temperature	V <sub>CC</sub>
CY62136CV18	Industrial	-40°C to +85°C	1.65V to 1.95V

**Product Portfolio**

Product	V <sub>CC</sub> Range			Speed	Power Dissipation (Industrial)				Typ. <sup>[4]</sup>	Max.
					Operating (I <sub>CC</sub> )		Standby (I <sub>SB2</sub> )			
	V <sub>CC(min)</sub>	V <sub>CC(typ)</sub> <sup>[4]</sup>	V <sub>CC(max)</sub>		f = 1 MHz		f = f <sub>max</sub>			
					Typ. <sup>[4]</sup>	Max.	Typ. <sup>[4]</sup>	Max.		
CY62136CV18	1.65V	1.80V	1.95V	55 ns	0.5 mA	2 mA	2 mA	7 mA	1 μA	8 μA
				70 ns	0.5 mA	2 mA	1.5 mA	6 mA		

**Notes:**

- NC pins are not connected to the die.
- E3 (DNU) can be left as NC or V<sub>SS</sub> to ensure proper application.
- V<sub>IL</sub>(min) = -2.0V for pulse durations less than 20 ns.
- Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at V<sub>CC</sub> = V<sub>CC(typ)</sub>, T<sub>A</sub> = 25°C.

**Electrical Characteristics** Over the Operating Range

Parameter	Description	Test Conditions		CY62136CV18-55			CY62136CV18-70			Unit
				Min.	Typ. <sup>[4]</sup>	Max.	Min.	Typ. <sup>[4]</sup>	Max.	
V <sub>OH</sub>	Output HIGH Voltage	I <sub>OH</sub> = -0.1 mA	V <sub>CC</sub> = 1.65V	1.4			1.4			V
V <sub>OL</sub>	Output LOW Voltage	I <sub>OL</sub> = 0.1 mA	V <sub>CC</sub> = 1.65V			0.2			0.2	V
V <sub>IH</sub>	Input HIGH Voltage			1.4		V <sub>CC</sub> +0.2V	1.4		V <sub>CC</sub> +0.2V	V
V <sub>IL</sub>	Input LOW Voltage			-0.2		0.4	-0.2		0.4	V
I <sub>IX</sub>	Input Leakage Current	GND ≤ V <sub>I</sub> ≤ V <sub>CC</sub>		-1		+1	-1		+1	μA
I <sub>IOZ</sub>	Output Leakage Current	GND ≤ V <sub>O</sub> ≤ V <sub>CC</sub> , Output Disabled		-1		+1	-1		+1	μA
I <sub>CC</sub>	V <sub>CC</sub> Operating Supply Current	f = f <sub>MAX</sub> = 1/t <sub>RC</sub>	V <sub>CC</sub> = 1.95V I <sub>OUT</sub> = 0 mA CMOS levels		2	7		1.5	6	mA
		f = 1 MHz			0.5	2		0.5	2	mA
I <sub>SB1</sub>	Automatic CE Power-Down Current— CMOS Inputs	$\overline{CE} \geq V_{CC} - 0.2V$ , $V_{IN} \geq V_{CC} - 0.2V$ , $V_{IN} \leq 0.2V$ $f = f_{MAX}$ (Address and Data Only), $f = 0$ (OE, WE, BHE, and BLE)			1	8		1	8	μA
I <sub>SB2</sub>	Automatic CE Power-Down Current— CMOS Inputs	$\overline{CE} \geq V_{CC} - 0.2V$ $V_{IN} \geq V_{CC} - 0.2V$ or $V_{IN} \leq 0.2V$ , $f = 0$ , $V_{CC} = 1.95V$								

**Capacitance<sup>[5]</sup>**

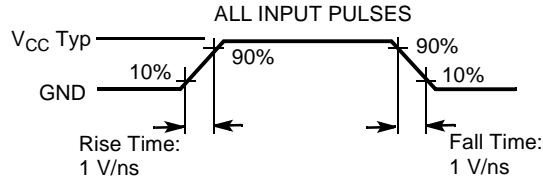

Parameter	Description	Test Conditions	Max.	Unit
C <sub>IN</sub>	Input Capacitance	T <sub>A</sub> = 25°C, f = 1 MHz,	6	pF
C <sub>OUT</sub>	Output Capacitance	V <sub>CC</sub> = V <sub>CC(typ)</sub>	8	pF

**Thermal Resistance**


Description	Test Conditions	Symbol	BGA	Unit
Thermal Resistance (Junction to Ambient) <sup>[5]</sup>	Still Air, soldered on a 4.25 x 1.125 inch, 4-layer printed circuit board	θ <sub>JA</sub>	55	°C/W
Thermal Resistance (Junction to Case) <sup>[5]</sup>		θ <sub>JC</sub>	16	°C/W

**Note:**

- Tested initially and after any design or process changes that may affect these parameters.

**AC Test Loads and Waveforms**


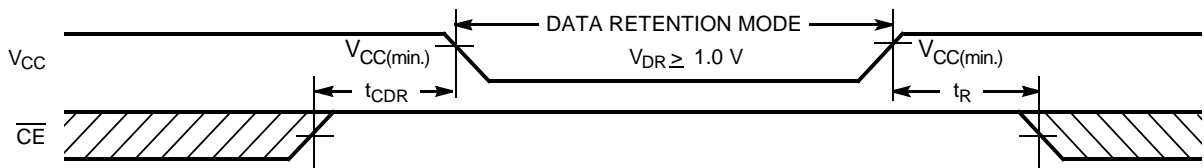
Equivalent to: THÉVENIN EQUIVALENT



Parameters	1.8V	UNIT
R1	13500	Ohms
R2	10800	Ohms
R <sub>TH</sub>	6000	Ohms
V <sub>TH</sub>	0.80	Volts

**Data Retention Characteristics (Over the Operating Range)**

Parameter	Description	Conditions	Min.	Typ. <sup>[4]</sup>	Max.	Unit
V <sub>DR</sub>	V <sub>CC</sub> for Data Retention		1.0		1.95	V
I <sub>CCDR</sub>	Data Retention Current	V <sub>CC</sub> = 1.0V CE ≥ V <sub>CC</sub> - 0.2V, V <sub>IN</sub> ≥ V <sub>CC</sub> - 0.2V or V <sub>IN</sub> ≤ 0.2V		0.5	5	μA
t <sub>CDR</sub> <sup>[5]</sup>	Chip Deselect to Data Retention Time		0			ns
t <sub>R</sub> <sup>[6]</sup>	Operation Recovery Time		t <sub>RC</sub>			ns

**Data Retention Waveform**

**Note:**

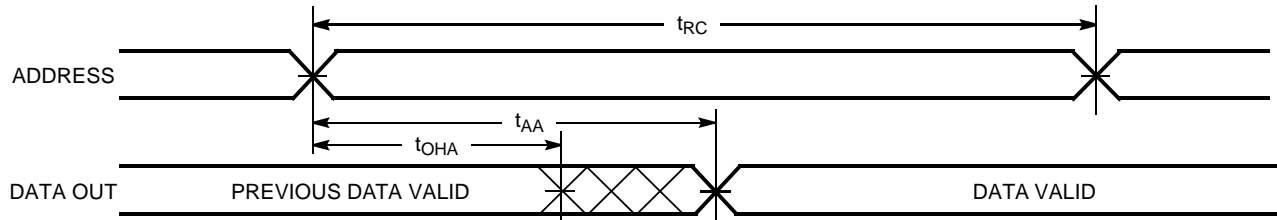
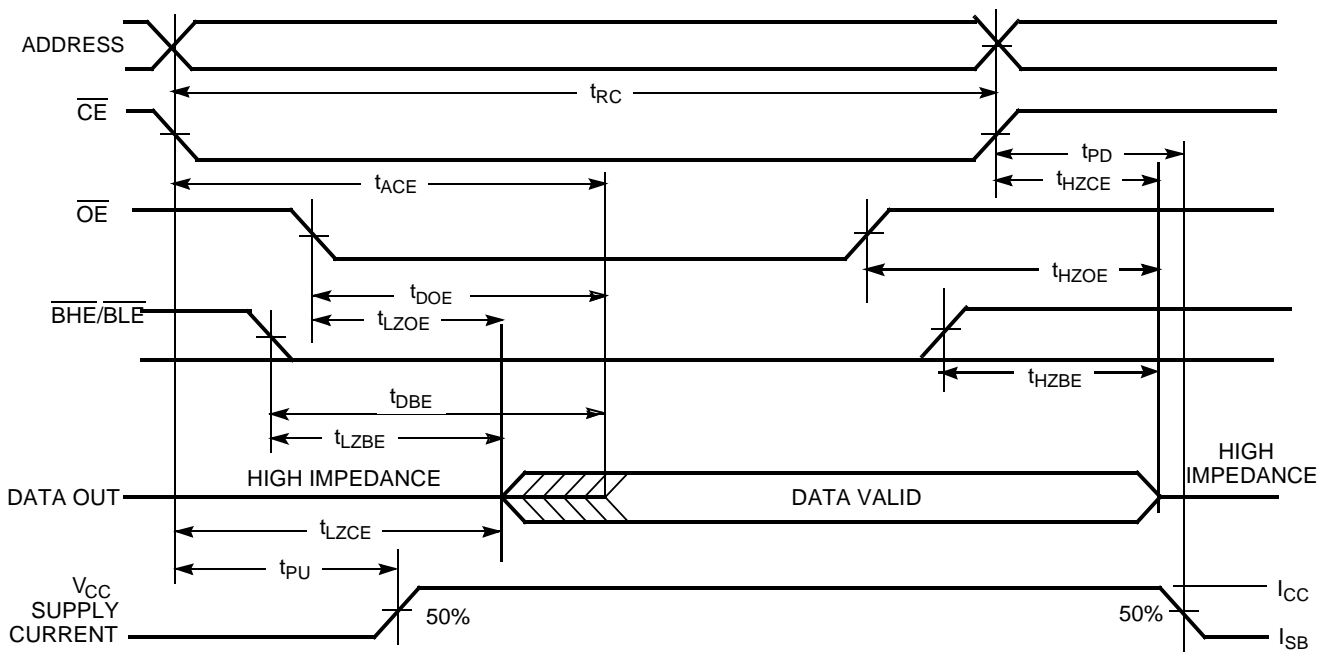
6. Full device operation requires linear V<sub>CC</sub> ramp from V<sub>DR</sub> to V<sub>CC(min)</sub> ≥ 100 μs or stable at V<sub>CC(min)</sub> ≥ 100 μs.

**Switching Characteristics** Over the Operating Range<sup>[7]</sup>

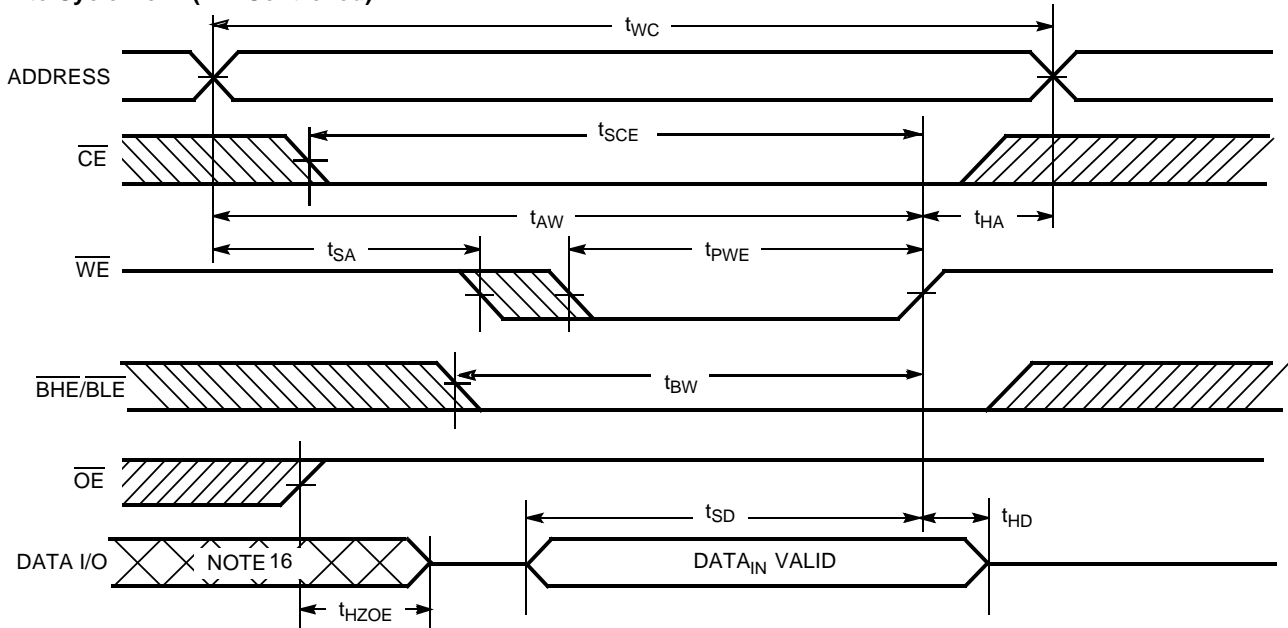
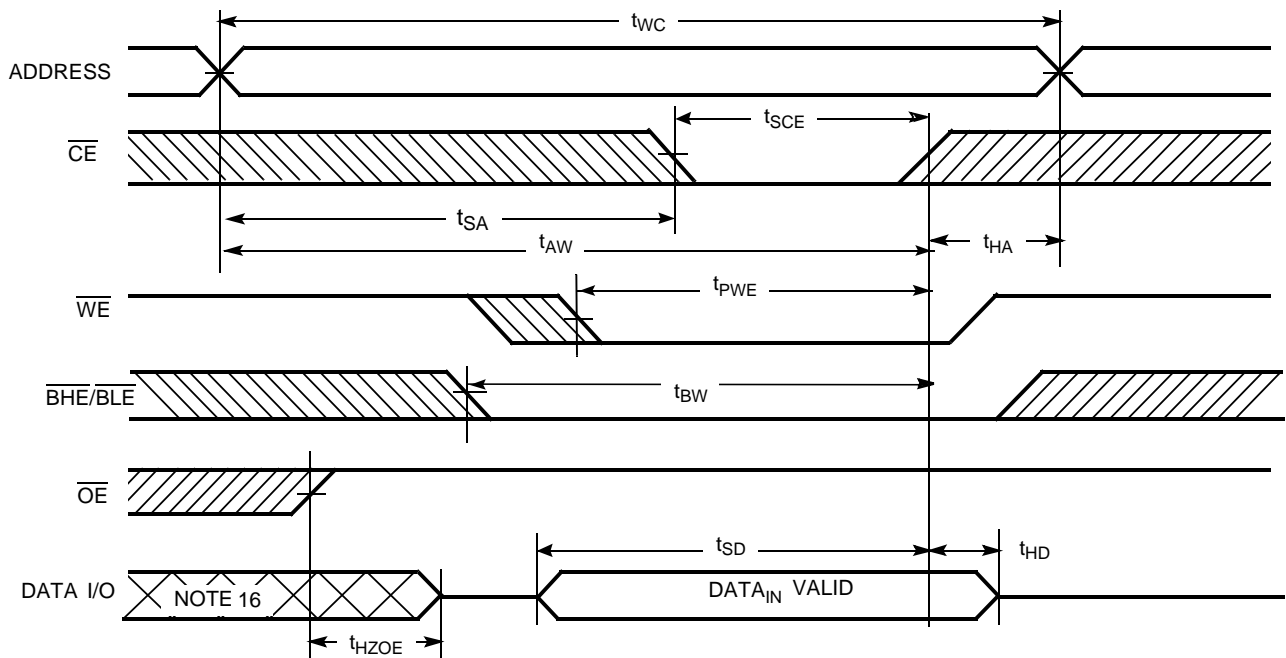
Parameter	Description	55 ns		70 ns		Unit
		Min.	Max.	Min.	Max.	
<b>Read Cycle</b>						
t <sub>RC</sub>	Read Cycle Time	55		70		ns
t <sub>AA</sub>	Address to Data Valid		55		70	ns
t <sub>OHA</sub>	Data Hold from Address Change	10		10		ns
t <sub>ACE</sub>	$\overline{CE}$ LOW to Data Valid		55		70	ns
t <sub>DOE</sub>	$\overline{OE}$ LOW to Data Valid		25		35	ns
t <sub>LZOE</sub>	$\overline{OE}$ LOW to Low Z <sup>[8]</sup>	5		5		ns
t <sub>HZOE</sub>	$\overline{OE}$ HIGH to High Z <sup>[8, 9]</sup>		20		25	ns
t <sub>LZCE</sub>	$\overline{CE}$ LOW to Low Z <sup>[8]</sup>	5		10		ns
t <sub>HZCE</sub>	$\overline{CE}$ HIGH to High Z <sup>[8, 9]</sup>		20		25	ns
t <sub>PU</sub>	$\overline{CE}$ LOW to Power-Up	0		0		ns
t <sub>PD</sub>	$\overline{CE}$ HIGH to Power-Down		55		70	ns
t <sub>DBE</sub>	$\overline{BLE}/\overline{BHE}$ LOW to Data Valid		25		35	ns
t <sub>LZBE</sub>	$\overline{BLE}/\overline{BHE}$ LOW to Low Z <sup>[8]</sup>	5		5		ns
t <sub>HZBE</sub>	$\overline{BLE}/\overline{BHE}$ HIGH to High Z <sup>[8, 9]</sup>		20		25	ns
<b>Write Cycle<sup>[10]</sup></b>						
t <sub>WC</sub>	Write Cycle Time	55		70		ns
t <sub>SCE</sub>	$\overline{CE}$ LOW to Write End	40		60		ns
t <sub>AW</sub>	Address Set-Up to Write End	40		60		ns
t <sub>HA</sub>	Address Hold from Write End	0		0		ns
t <sub>SA</sub>	Address Set-Up to Write Start	0		0		ns
t <sub>PWE</sub>	$\overline{WE}$ Pulse Width	40		50		ns
t <sub>BW</sub>	$\overline{BLE}/\overline{BHE}$ LOW to Write End	40		60		ns
t <sub>SD</sub>	Data Set-Up to Write End	25		30		ns
t <sub>HD</sub>	Data Hold from Write End	0		0		ns
t <sub>HZWE</sub>	$\overline{WE}$ LOW to High Z <sup>[8, 9]</sup>		20		25	ns
t <sub>LZWE</sub>	$\overline{WE}$ HIGH to Low Z <sup>[8]</sup>	5		10		ns

**Notes:**

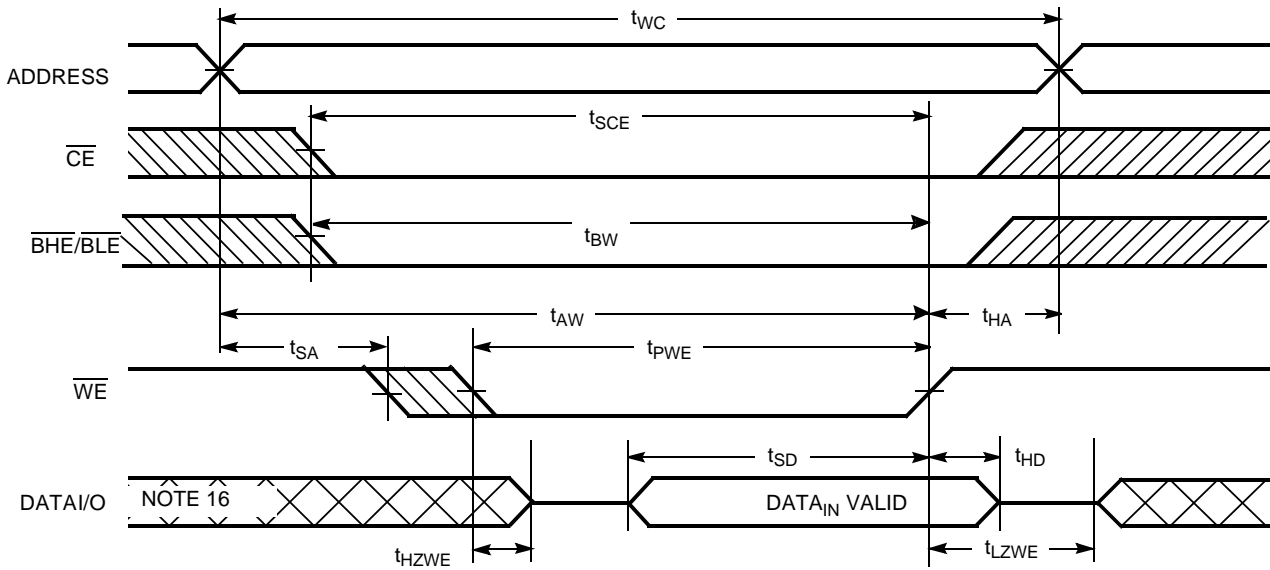
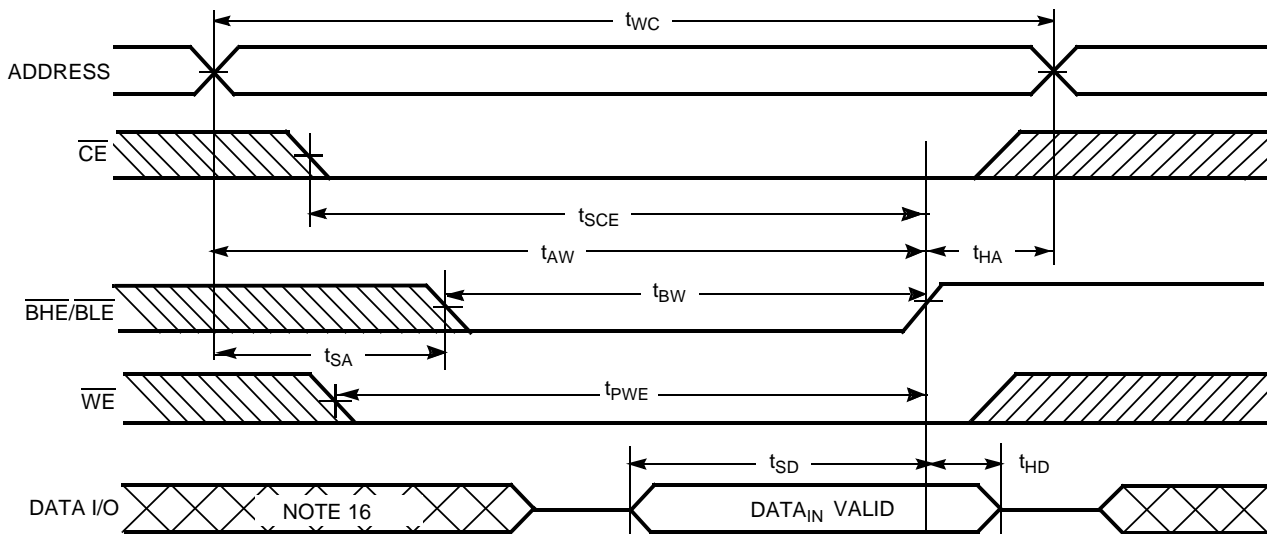
- Test conditions assume signal transition time of 3 ns or less, timing reference levels of  $V_{CC(typ)}/2$ , input pulse levels of 0 to  $V_{CC(typ)}$ , and output loading of the specified  $I_{OL}/I_{OH}$  and 30-pF load capacitance.
- At any given temperature and voltage condition,  $t_{HZCE}$  is less than  $t_{LZCE}$ ,  $t_{HZBE}$  is less than  $t_{LZBE}$ ,  $t_{HZOE}$  is less than  $t_{LZOE}$ , and  $t_{HZWE}$  is less than  $t_{LZWE}$  for any given device.
- $t_{HZOE}$ ,  $t_{HZCE}$ ,  $t_{HZBE}$  and  $t_{HZWE}$  transitions are measured when the outputs enter a high impedance state.
- The internal write time of the memory is defined by the overlap of  $\overline{WE}$ ,  $\overline{CE} = V_{IL}$ ,  $\overline{BHE}$  and/or  $\overline{BLE} = V_{IL}$ . All signals must be ACTIVE to initiate a write and any of these signals can terminate a write by going INACTIVE. The data input set-up and hold timing should be referenced to the edge of the signal that terminates the write.

**Switching Waveforms**
**Read Cycle No. 1 (Address Transition Controlled)<sup>[11, 12]</sup>**

**Read Cycle No. 2 ( $\overline{OE}$  Controlled)<sup>[12, 13]</sup>**

**Notes:**

11. Device is continuously selected.  $\overline{OE}$ ,  $\overline{CE} = V_{IL}$ ,  $\overline{BHE}$  and/or  $\overline{BLE} = V_{IL}$ .
12.  $\overline{WE}$  is HIGH for read cycle.
13. Address valid prior to or coincident with  $\overline{CE}$ ,  $\overline{BHE}$ ,  $\overline{BLE}$ , transition LOW.

**Switching Waveforms**
**Write Cycle No. 1 ( $\overline{WE}$  Controlled)** <sup>[10, 14, 15]</sup>

**Write Cycle No. 2 ( $\overline{CE}$  Controlled)** <sup>[10, 14, 15]</sup>

**Notes:**

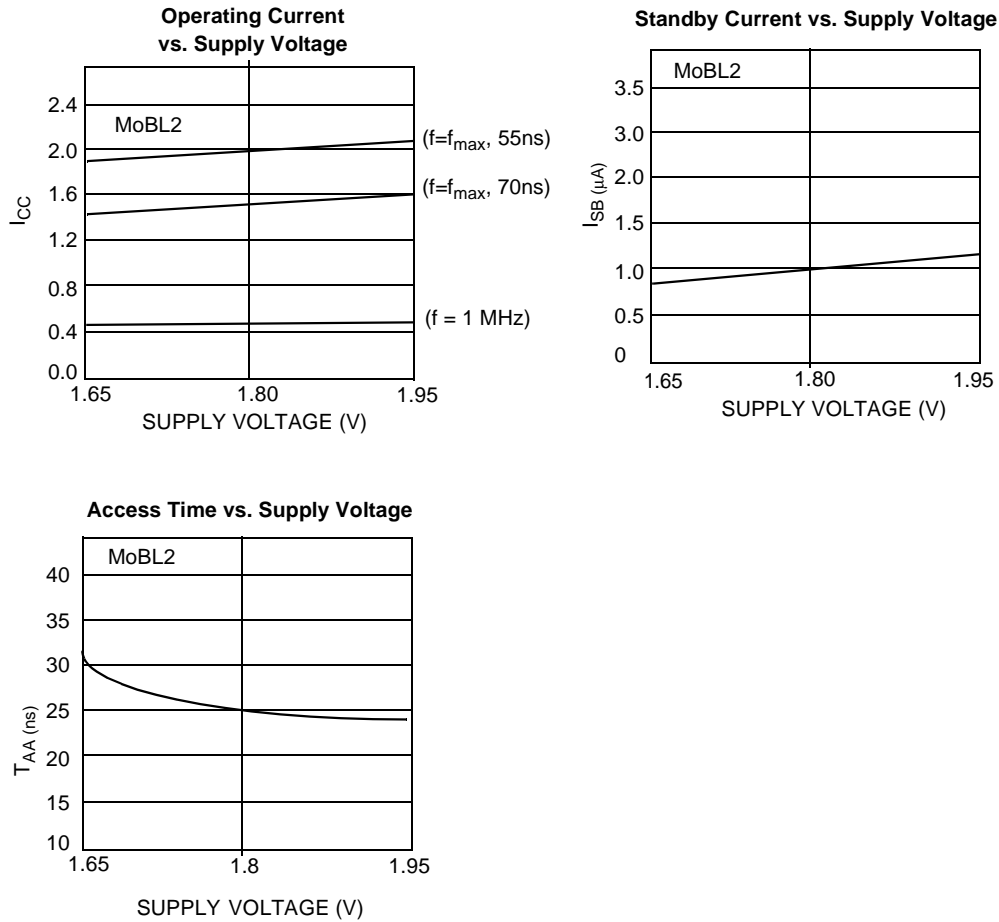
14. Data I/O is high impedance if  $\overline{OE} = V_{IH}$ .
15. If  $\overline{CE}$  goes HIGH simultaneously with  $\overline{WE}$  HIGH, the output remains in a high-impedance state.
16. During this period, the I/Os are in output state and input signals should not be applied.

**Switching Waveforms**
**Write Cycle No. 3 ( $\overline{WE}$  Controlled,  $\overline{OE}$  LOW)**

**Write Cycle No. 4 ( $\overline{BHE/BL\overline{E}}$  Controlled,  $\overline{OE}$  LOW)<sup>[15]</sup>**




## Typical DC and AC Characteristics

(Typical values are included for reference only and are not guaranteed or tested. Typical values are measured at  $V_{CC} = V_{CC(typ)}$ ,  $T_A = 25^\circ\text{C}$ .)

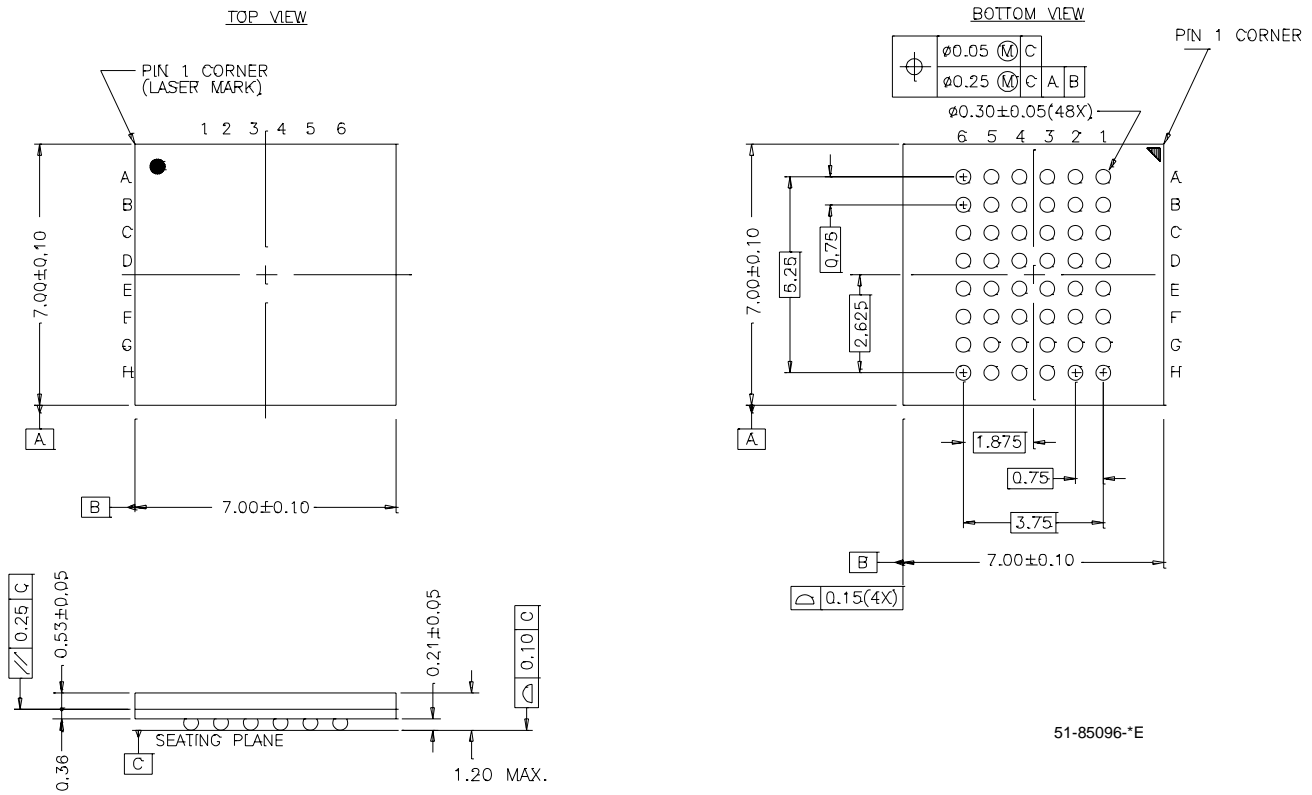


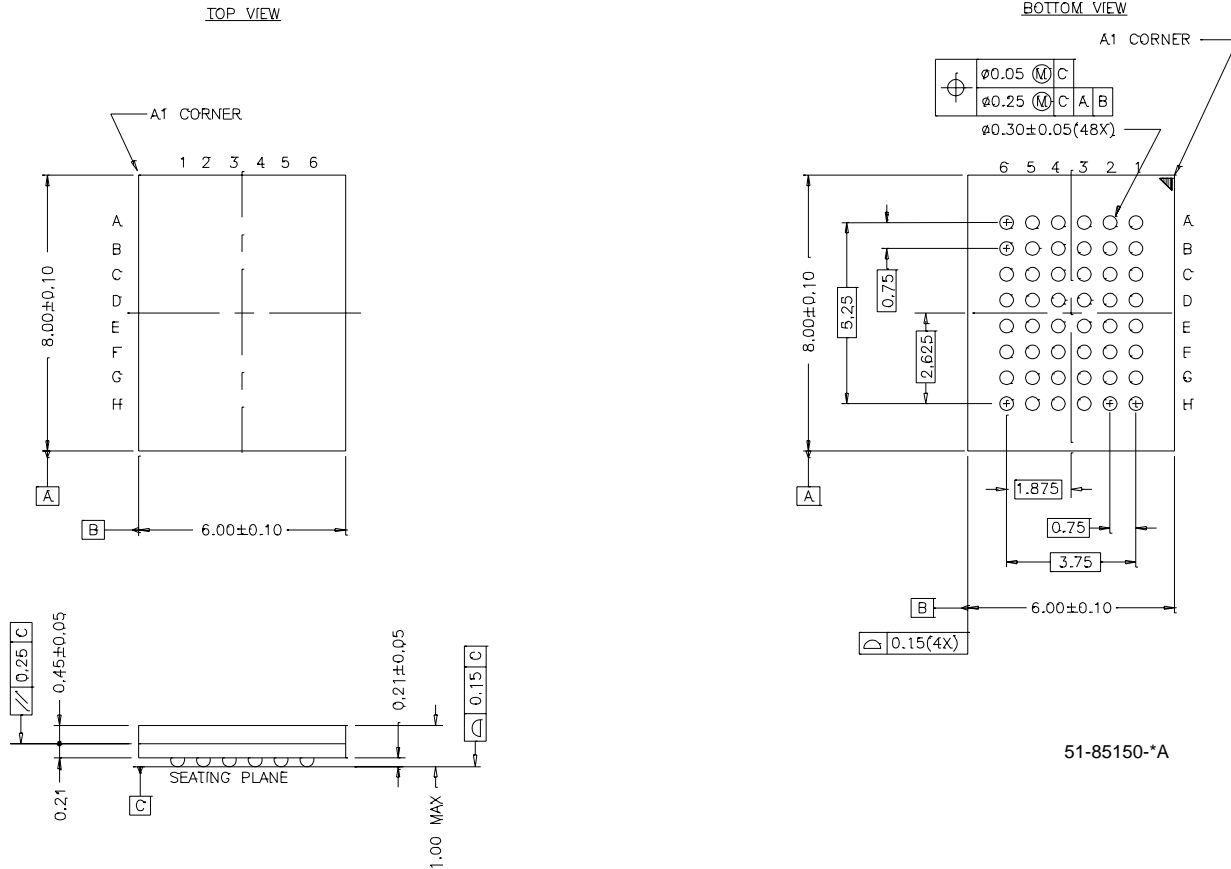
## Truth Table

CE	WE	OE	BHE	BLE	Inputs/Outputs	Mode	Power
H	X	X	X	X	High Z	Deselect/Power-Down	Standby ( $I_{SB}$ )
L	X	X	H	H	High Z	Output Disabled	Active ( $I_{CC}$ )
L	H	L	L	L	Data Out ( $I/O_0$ – $I/O_{15}$ )	Read	Active ( $I_{CC}$ )
L	H	L	H	L	Data Out ( $I/O_0$ – $I/O_7$ ); $I/O_8$ – $I/O_{15}$ in High Z	Read	Active ( $I_{CC}$ )
L	H	L	L	H	Data Out ( $I/O_8$ – $I/O_{15}$ ); $I/O_0$ – $I/O_7$ in High Z	Read	Active ( $I_{CC}$ )
L	H	H	L	L	High Z	Output Disabled	Active ( $I_{CC}$ )
L	H	H	H	L	High Z	Output Disabled	Active ( $I_{CC}$ )
L	H	H	L	H	High Z	Output Disabled	Active ( $I_{CC}$ )
L	L	X	L	L	Data In ( $I/O_0$ – $I/O_{15}$ )	Write	Active ( $I_{CC}$ )
L	L	X	H	L	Data In ( $I/O_0$ – $I/O_7$ ); $I/O_8$ – $I/O_{15}$ in High Z	Write	Active ( $I_{CC}$ )
L	L	X	L	H	Data In ( $I/O_8$ – $I/O_{15}$ ); $I/O_0$ – $I/O_7$ in High Z	Write	Active ( $I_{CC}$ )

**Ordering Information**

Speed (ns)	Ordering Code	Package Name	Package Type	Operating Range
70	CY62136CV18LL-70BAI	BA48A	48-Ball Fine Pitch BGA (7 mm x 7 mm x 1.2 mm)	Industrial
	CY62136CV18LL-70BVI	BV48A	48-Ball Fine Pitch BGA (6 mm x 8 mm x 1mm)	
55	CY62136CV18LL-55BAI	BA48A	48-Ball Fine Pitch BGA (7 mm x 7 mm x 1.2 mm)	
	CY62136CV18LL-55BVI	BV48A	48-Ball Fine Pitch BGA (6 mm x 8 mm x 1mm)	

**Package Diagram**
**48-Ball (7.00 mm x 7.00 mm x 1.2 mm) FBGA BA48A**


**Package Diagram (continued)**
**48-Lead VFBGA (6 x 8 x 1 mm) BV48A**


51-85150-\*A

MoBL is a registered trademark and MoBL2 and More Battery Life are trademarks of Cypress Semiconductor Corporation. All product and company names mentioned in this document may be the trademarks of their respective holders.



<b>Document Title: CY62136CV18 MoBL2™, 128K x 16 Static RAM</b>				
<b>Document Number: 38-05016</b>				
<b>REV.</b>	<b>ECN NO.</b>	<b>Issue Date</b>	<b>Orig. of Change</b>	<b>Description of Change</b>
**	106264	05/07/01	HRT/MGN	New Data Sheet
*A	107701	06/15/01	MGN	Delete data sheet. Not offering device.
*B	111522	11/06/01	GAV	Reactivate spec. Final data sheet.
*C	115865	09/04/02	MGN	Add BV pkg