

EPR1521S




- Designed for Lucent Technologies T7688 & T7690 Chipsets •
 - Robust construction allows IR/VP reflow processes •
 - Crosstalk : -65 dB or better •
 - 1500 Vrms Isolation •
 - Operating Temp. : 0°C to +70°C •


Electrical Parameters @ 25° C

Pri. OCL (mH Min.)	Leakage Inductance (μ H Max.)	Interwinding Capacitance (pF Max.)	Return Loss (dB Typ.)	Pri. DCR (Ω Typ.)	Turns Ratio (\pm 2%)	
@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	@ 100 KHz, 0.1 Vrms	@ 1-5 MHz	---	XMIT	RCV
---	@ Pri. w/ Sec. shorted	Pri. to Sec.	---	---	Pri	Sec.
1.2	0.5	20	15	1	1: 1.36	1: 1.36CT

Schematic

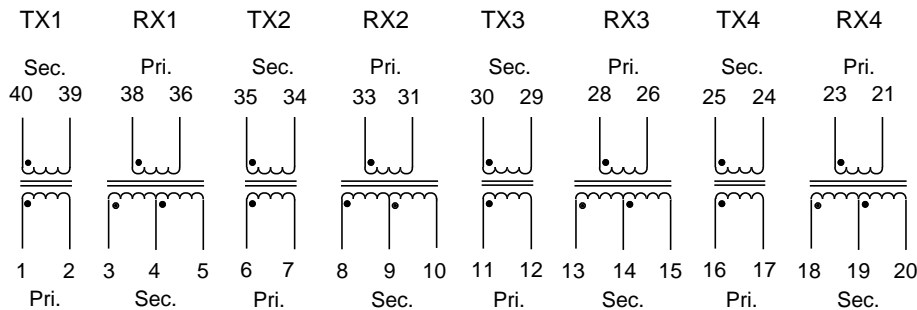

Package

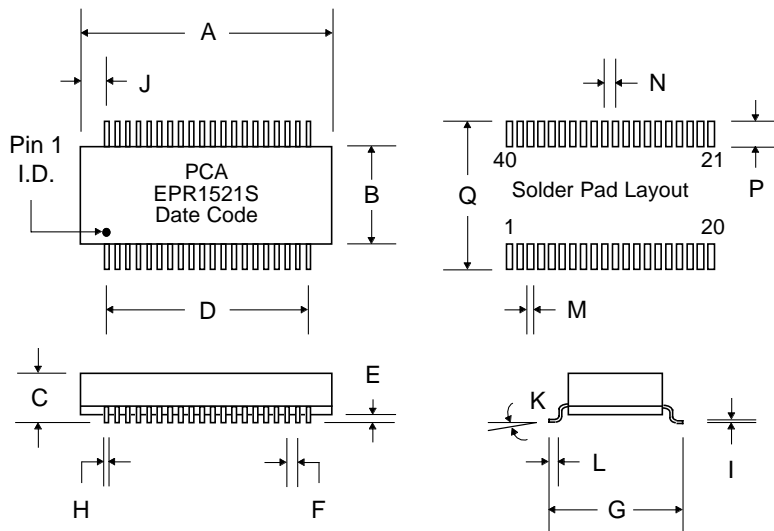

Dimensions

Dim.	(Inches)			(Millimeters)		
	Min.	Max.	Nom.	Min.	Max.	Nom.
A	1.110	1.130	1.120	28.19	28.70	28.45
B	.470	.490	.480	11.94	12.45	12.19
C	.250	.270	.260	6.35	6.86	6.60
D	---	---	.950	---	---	24.13
E	.010	.015	.012	.254	.381	.305
F	---	---	.050	---	---	1.27
G	.590	.610	.600	14.99	15.49	15.24
H	.016	.022	.019	.406	.559	.483
I	.008	.012	.010	.203	.305	.254
J	---	---	.085	---	---	2.16
K	0°	8°	4°	0°	8°	4°
L	.025	.045	.035	.635	1.14	.889
M	---	---	.030	---	---	.762
N	---	---	.050	---	---	1.27
P	---	---	.090	---	---	2.29
Q	---	---	.670	---	---	17.02