

## SCHOTTKY BARRIER RECTIFIERS

VOLTAGE RANGE: 30 - 100 V  
CURRENT: 15 A


### FEATURES

- ◇ High surge capacity.
- ◇ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications.
- ◇ Metal silicon junction, majority carrier conduction.
- ◇ High current capacity, low forward voltage drop.
- ◇ Guard ring for over voltage protection.

### MECHANICAL DATA

- ◇ Case: JEDEC TO-220AB, molded plastic body
- ◇ Terminals: Leads, solderable per MIL-STD-750, Method 2026
- ◇ Polarity: As marked
- ◇ Position: Any
- ◇ Weight: 0.071ounce, 2.006 grams

### TO-220AB

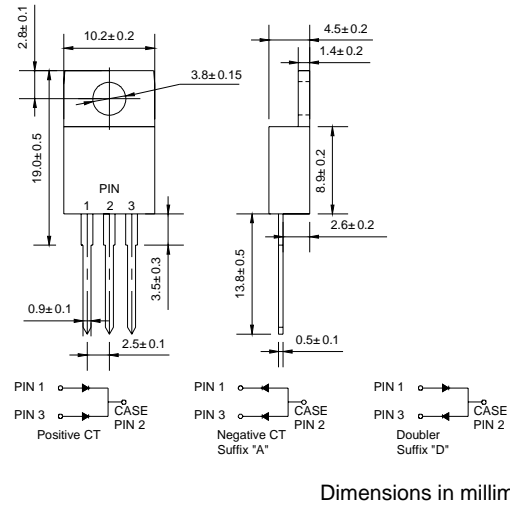

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.


		MBR 1530CT	MBR 1535CT	MBR 1540CT	MBR 1545CT	MBR 1550CT	MBR 1560CT	MBR 1580CT	MBR 15100CT	UNITS
Maximum recurrent peak reverse voltage	$V_{RRM}$	30	35	40	45	50	60	80	100	V
Maximum RMS Voltage	$V_{RMS}$	21	25	28	32	35	42	56	70	V
Maximum DC blocking voltage	$V_{DC}$	30	35	40	45	50	60	80	100	V
Maximum average forward total device rectified current @ $T_C = 105^\circ\text{C}$	$I_{F(AV)}$	15								A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load	$I_{FSM}$	150								A
Maximum forward voltage ( $I_F=7.5\text{A}, T_C=25^\circ\text{C}$ ) ( $I_F=7.5\text{A}, T_C=125^\circ\text{C}$ ) (Note 1) ( $I_F=15\text{A}, T_C=25^\circ\text{C}$ ) ( $I_F=15\text{A}, T_C=125^\circ\text{C}$ )	$V_F$		-				0.75	0.80		V
			0.57				0.65	-		
			0.84				-	-		
			0.72				-	-		
Maximum reverse current @ $T_C=25^\circ\text{C}$ at rated DC blocking voltage @ $T_C=125^\circ\text{C}$	$I_R$		0.1				1.0	0.1		m A
			15				50	6.0 <sup>3)</sup>		
Maximum thermal resistance (Note2)	$R_{\theta JC}$	3.0								$^\circ\text{C}/\text{W}$
Operating junction temperature range	$T_J$	- 55 ---- + 150								$^\circ\text{C}$
Storage temperature range	$T_{STG}$	- 55 ---- + 150								$^\circ\text{C}$

NOTE: 1. Pulse test: 300µs pulse width, 1% duty cycle.


2. Thermal resistance from junction to case.

3.  $T_C=100^\circ\text{C}$


**FIG.1 – PEAK FORWARD SURGE CURRENT**

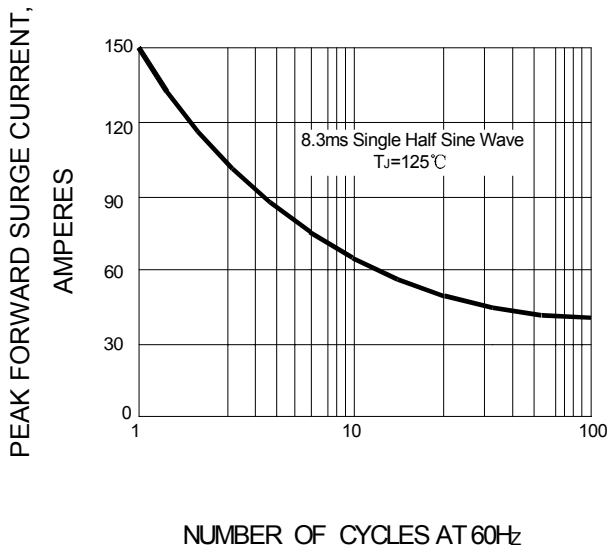

**FIG.2 – FORWARD DERATING CURVE**

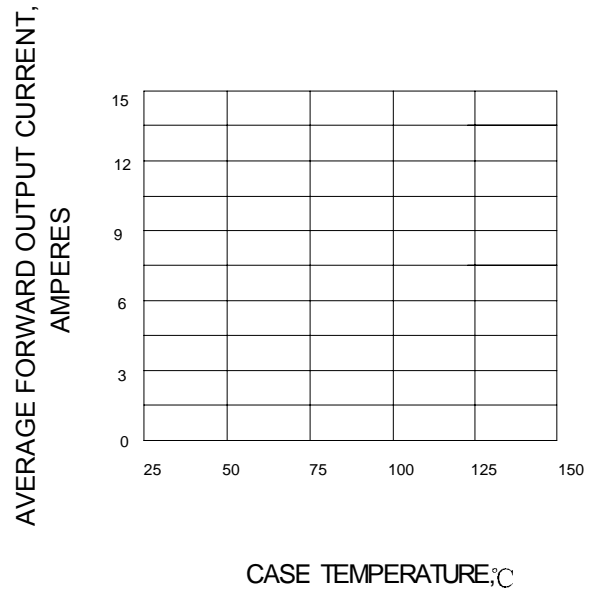

**FIG.3 – TYPICAL FORWARD CHARACTERISTIC**

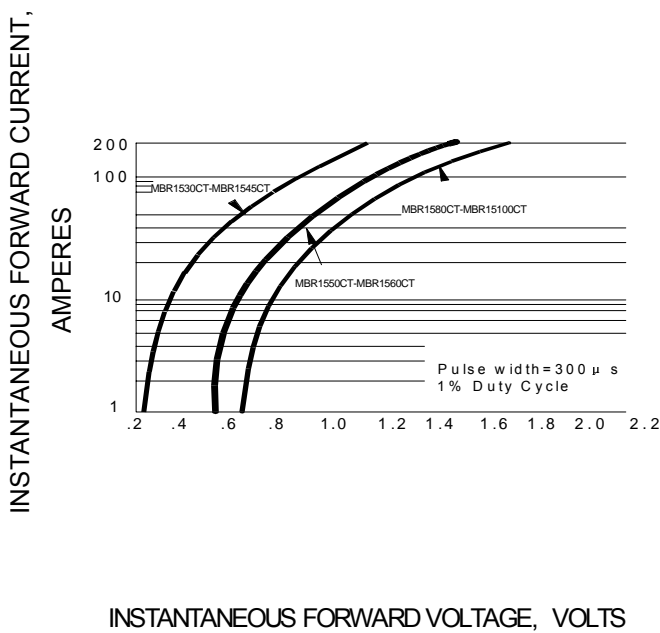

**FIG.4 – TYPICAL REVERSE CHARACTERISTIC**

