

### FEATURES

- Low Forward Voltage
- High Surge Current Capability
- Low Leakage Current
- Low Inductance Package

### APPLICATIONS

- Field Supply For DC Motors
- Line Rectifiers For Transistorized AC Motor Controllers
- Non-controllable Rectifiers For AC/DC Converter



### MODULE TYPE

TYPE	Circuit Diagram	VRRM (Repetitive Peak Reverse Voltage)	VRSM (Non-Repetitive Peak Reverse Voltage)	Unit
	U			
	MMD200S160U	1600	1700	V

### ABSOLUTE MAXIMUM RATINGS

*T<sub>c</sub>=25°C unless otherwise specified*

Symbol	Parameter	Test Conditions	Values	Unit
I <sub>F(AV)</sub>	Average Forward Current	Single phase, half wave, 180°conduction, T <sub>c</sub> = 85°C	200	A
I <sub>F(RMS)</sub>	R.M.S. Forward Current		310	
I <sub>FSM</sub>	Non-Repetitive Surge Forward Current	1/2 cycle, 50HZ, peak value T <sub>c</sub> =45°C	6500	
		1/2 cycle, 60HZ, peak value T <sub>c</sub> =45°C	7000	
I <sup>2</sup> t	I <sup>2</sup> t (For Fusing)	1/2 cycle, 50HZ, peak value T <sub>c</sub> =45°C	211.2	KA <sup>2</sup> s
		1/2 cycle, 60HZ, peak value T <sub>c</sub> =45°C	203.3	KA <sup>2</sup> s
P <sub>D</sub>	Power Dissipation		781	W
T <sub>J</sub>	Junction Temperature		-40 to +150	°C
T <sub>STG</sub>	Storage Temperature Range		-40 to +125	°C
V <sub>ISO</sub>	Isolation Breakdown Voltage	AC, 50Hz(R.M.S), t=1minute	3000	V
Torque	Module-to-Sink	Recommended (M6)	3~5	N.m
Torque	Module Electrodes	Recommended (M6)	3~5	N.m
R <sub>th (J-C)</sub>	Junction-to-Case Thermal Resistance		0.16	K /W
Weight			170	g

**MacMic Science & Technology Co., Ltd.**

Add: #18, Hua Shan Zhong Lu, New District, Changzhou City, Jiangsu Province, P. R .of China

Tel.: +86-519-85163708 Fax: +86-519-85162291 Post Code: 213022 Website: [www.macmicst.com](http://www.macmicst.com)

# MMD200S160U

## ELECTRICAL AND THERMAL CHARACTERISTICS $T_C=25^{\circ}\text{C}$ unless otherwise specified

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
$I_{RM}$	Max.Reverse Leakage Current	$V_R = V_{RRM}$			500	$\mu\text{A}$
		$V_R = V_{RRM}, T_J = 125^{\circ}\text{C}$			10	mA
$V_F$	Forward Voltage	$I_F = 600\text{A}$			1.5	V
$V_{T0}$	For power-loss calculations only				0.8	V
$r_T$	$T_J = 125^{\circ}\text{C}$				1.0	m $\Omega$

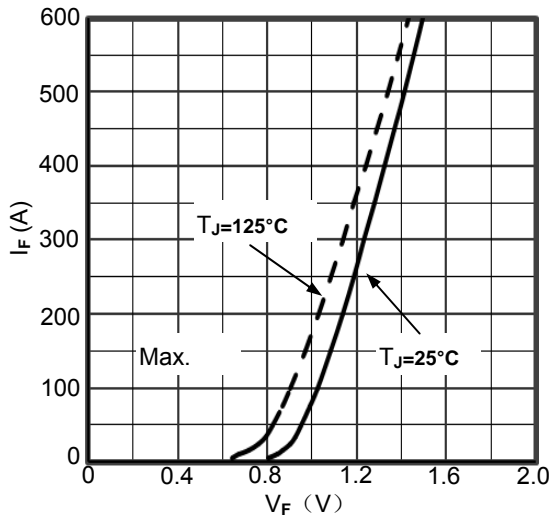


Figure 1. Forward current vs. voltage drop

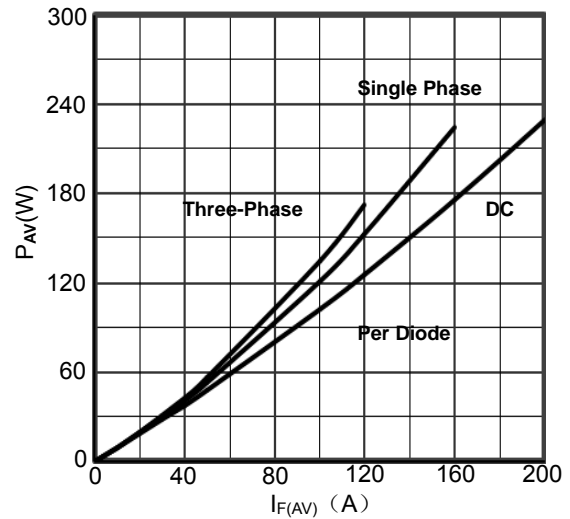


Figure 2. Diode Power dissipation vs.  $I_{F(AV)}$

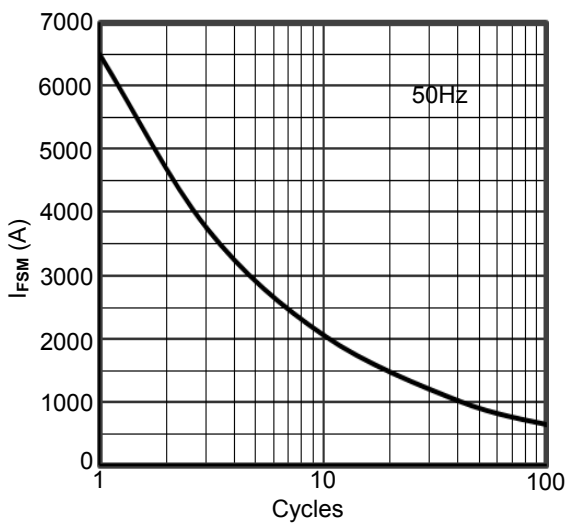


Figure 3. Max Non-Repetitive Forward Surge Current

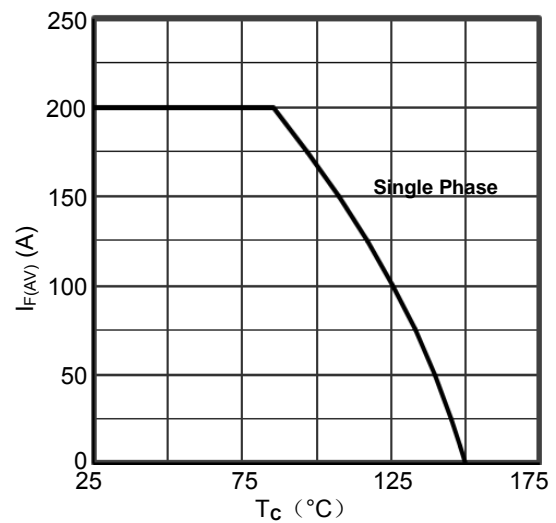


Figure 4. Forward current vs. Case temperature


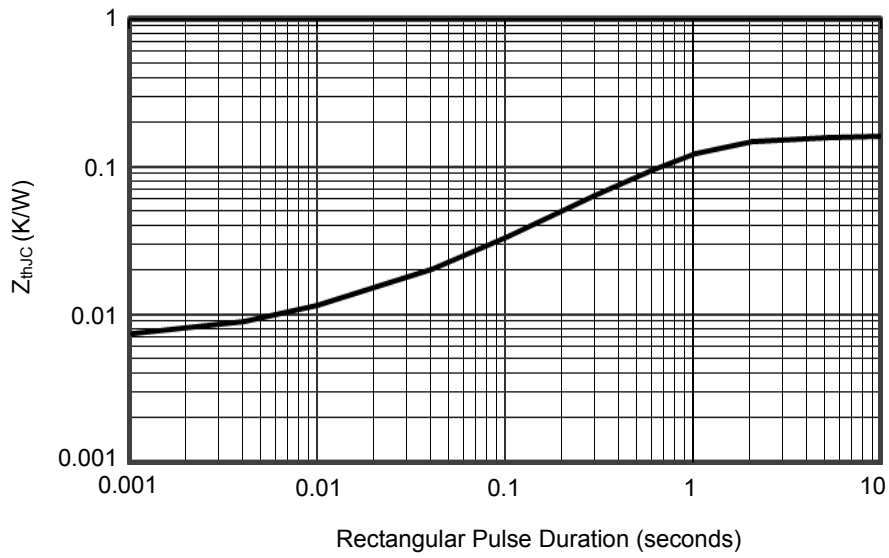


Figure5. Transient Thermal Impedance

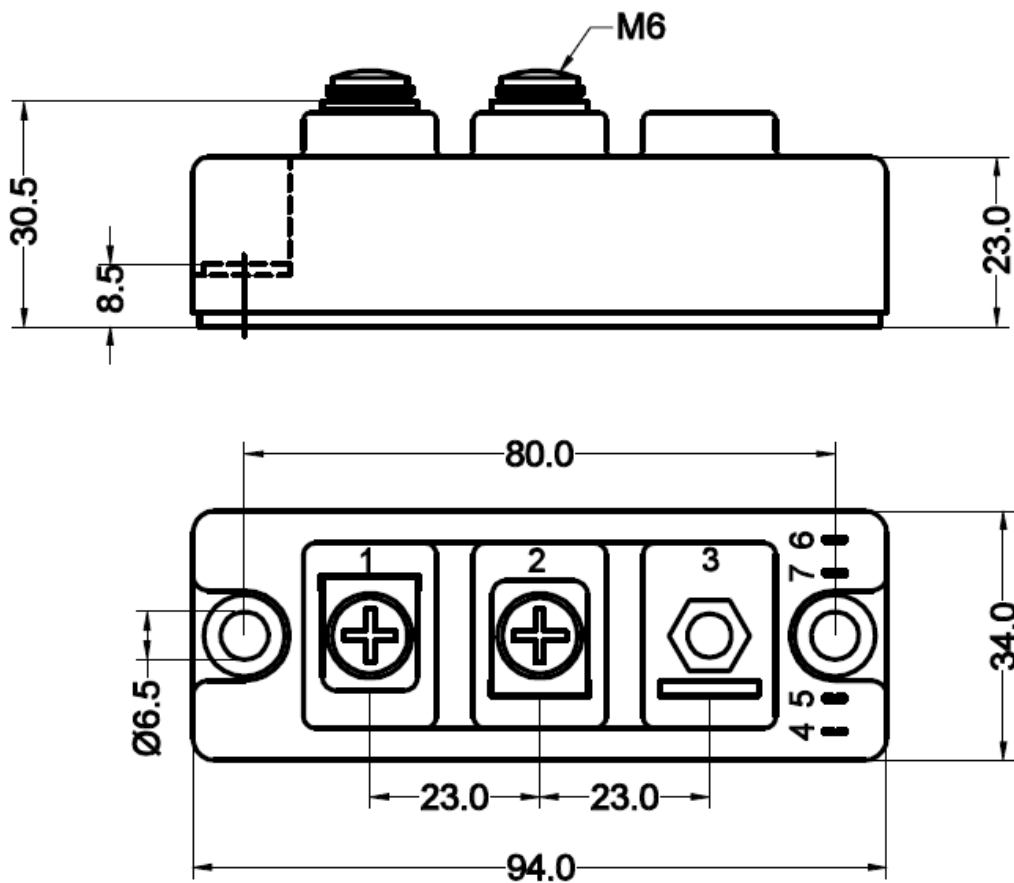

Dimensions in Millimeters  
Figure6. Package Outline