



MUR820 THRU MUR860

8.0 AMPS. Ultrafast Plastic Rectifiers



Voltage Range
200 to 600 Volts
Current
8.0 Amperes



Features

- ✧ Low forward voltage drop
- ✧ High current capability
- ✧ High reliability
- ✧ High surge current capability

Mechanical Data

- ✧ Cases: to-220a molded plastic
- ✧ Epoxy: UL 94V-0 rate flame retardant
- ✧ Terminals: Leads, solderable per MIL-STD-202, Method 208 guaranteed
- ✧ Polarity: As marked
- ✧ High temperature soldering guaranteed: 260°C/10 seconds/.25", (6.35mm) from case.
- ✧ Weight: 2.24 grams

TO-220A

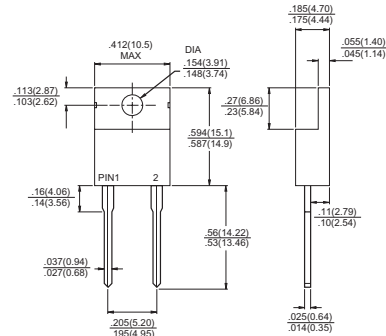

Dimensions in inches and (millimeters)

Maximum Ratings and Electrical Characteristics

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%

Type Number	Symbol	MUR820	MUR840	MUR860	Units
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	400	600	V
Maximum RMS Voltage	V_{RMS}	140	280	420	V
Maximum DC Blocking Voltage	V_{DC}	200	400	600	V
Maximum Average Forward Rectified Current .375"(9.5mm) Lead Length (See Fig. 1)	$I_{(AV)}$	8.0			A
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I_{FSM}	100			A
Maximum Instantaneous Forward Voltage @ 8.0A	V_F	0.975	1.30	1.7	V
Maximum DC Reverse Current @ $T_C=25^\circ C$ at Rated DC Blocking Voltage @ $T_C=150^\circ C$ (Note 4)	I_R	5.0 250			μA μA
Maximum Reverse Recovery Time (Note 2)	T_{rr}	25	50		nS
Typical Thermal Resistance (Note 3)	$R_{\theta JC}$	3.0	2.0		$^{\circ}C/W$
Operating Temperature Range	T_J	-65 to +175			$^{\circ}C$
Storage Temperature Range	T_{STG}	-65 to +175			$^{\circ}C$

Notes: 1. Measured at 1 MHz and Applied Reverse Voltage of 4..0 Volts D.C.

2. Reverse Recovery Test Conditions: $I_F=0.5A$, $I_R=1.0A$, $I_{RR}=0.25A$

3. Thermal Resistance from Junction to Case, Mounted on Heatsink Size of 2" x 3" x 0.25" Al-Plate.

4. Pulse lest: $t_p = 300 \mu s$, Duty Cycle < 2%.

RATINGS AND CHARACTERISTIC CURVES (MUR820 THRU MUR860)

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

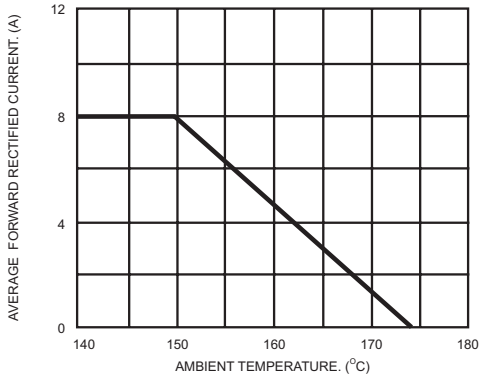


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

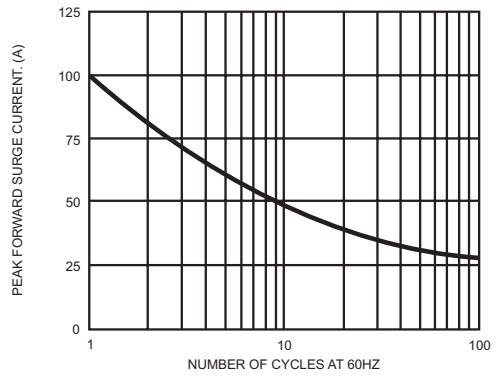


FIG. 3- TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

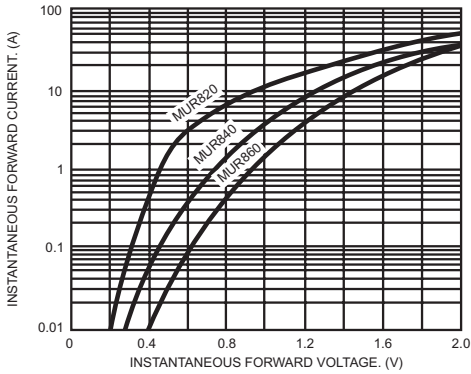


FIG. 4- TYPICAL SL REVERSE CHARACTERISTICS

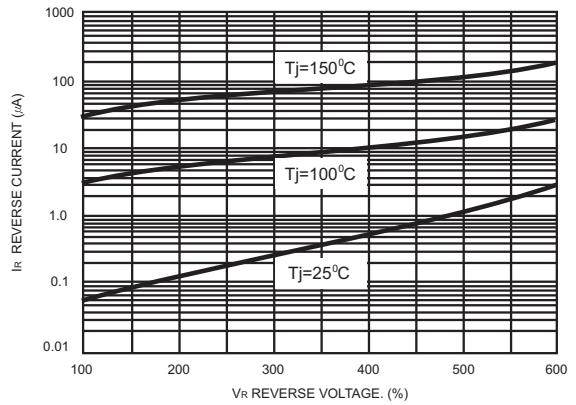


FIG. 5- TYPICAL JUNCTION CAPACITANCE PER LEG

