


COMPONENTS	IMPEDANCE
3/4"-20 THREADED TWINAX MALE	N/A
3/4"-20 THREADED TWINAX MALE	N/A
PE-S330	100 OHM

Standard Lengths	
-18	18"
-36	36"
-60	60"
-90	90"
-120	120"
-180	180"
-XXX	Custom Length in Inches

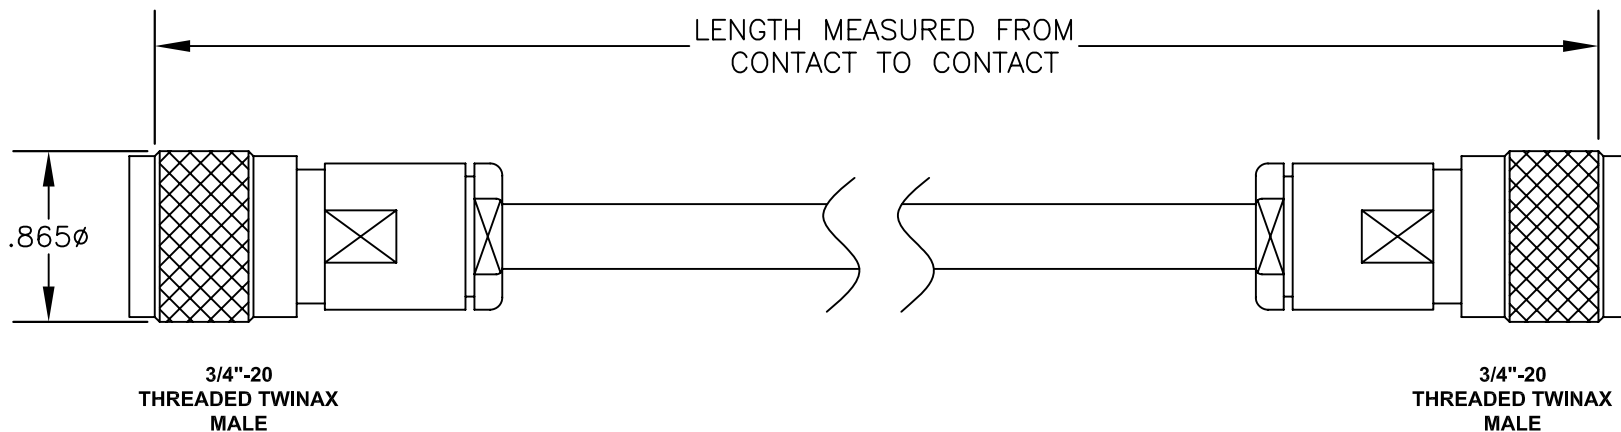

**PASTERNAK ENTERPRISES, INC.**  
P.O BOX 16759, IRVINE, CA 92623  
PHONE (949) 261-1920 FAX (949) 261-7451  
WEB ADDRESS: [www.pasternack.com](http://www.pasternack.com)  
E-MAIL ADDRESS: [sales@pasternack.com](mailto:sales@pasternack.com)  
**COAXIAL & FIBER OPTICS**

DWG TITLE  
**PE3930-XX**

DES. 3/4"-20 THREADED TWINAX MALE TO, 3/4"-20 THREADED TWINAX MALE, 100 OHM, PE-S330 TWINAXIAL CABLE

REV. A	FSCM NO. 53919	CAD FILE 050609	SCALE N/A	SIZE A	127
--------	----------------	-----------------	-----------	--------	-----

- NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
  2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
  3. DIMENSIONS ARE IN INCHES.
  4. LENGTH TOLERANCE IS  $\pm 1.5\%$  OR  $3/8"$ , WHICHEVER IS GREATER.