

MZ SERIES

PZ8GgxxxxEH30 3 KV ISOLATED 1.5 W REGULATED SINGLE OUTPUT SIP12

Available Inputs:

5, 12 and 15 VDC

Available Outputs:

5, 12 and 15 VDC

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range +/- 10 %

Filter Capacitors

Isolation Specifications

Rated voltage 3000 VDC

Resistance 1000 MOhm

Output Specifications

Voltage accuracy +/- 3 %, max.

Ripple and noise (at 20 MHz BW) 50 mV p-p, max.

Short circuit protection Momentary

Line voltage regulation +/- 0.5 %

Load voltage regulation +/- 0.5 %

Temperature coefficient +/- 0,02 % / °C

General Specifications

Efficiency 55 % min.

Switching frequency 40 KHz, typ.

Environmental Specifications

Operating temperature (ambient) - 20° C to + 71° C

Storage temperature - 25 °C to + 125 °C

Derating See graph

Humidity Up to 90 %, non condensing

Cooling Free air convection

Physical Characteristics

Dimensions 34.25 x 10.00 x 13.95 mm


1.35 x 0.40 x 0.55 inches

Case material Non conductive black plastic


Examples of Partnumbers

PART NO.	INPUT VOLTAGE (VDC)	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)
PZ8GG-0505EH30	5	5	300
PZ8GG-0512EH30	5	12	125
PZ8GG-0515EH30	5	15	100
PZ8GG-1205EH30	12	5	300
PZ8GG-1212EH30	12	12	125
PZ8GG-1215EH30	12	15	100
PZ8GG-1505EH30	15	5	300
PZ8GG-1512EH30	15	12	125
PZ8GG-1515EH30	15	15	100

Dimensions

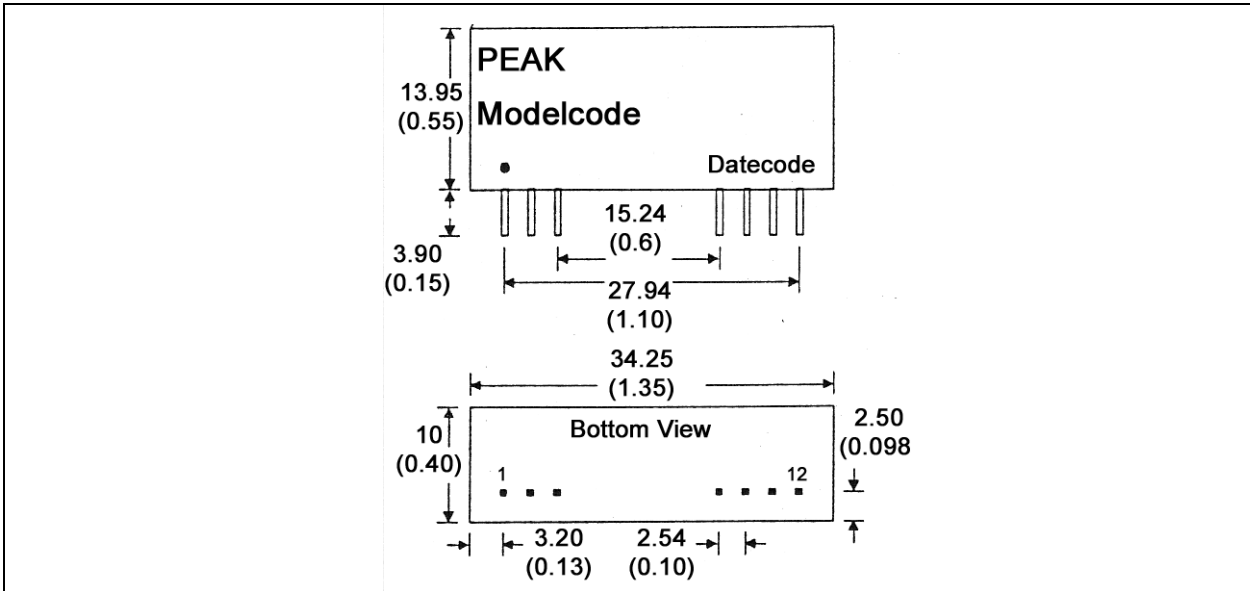

Derating Graph and Pinning

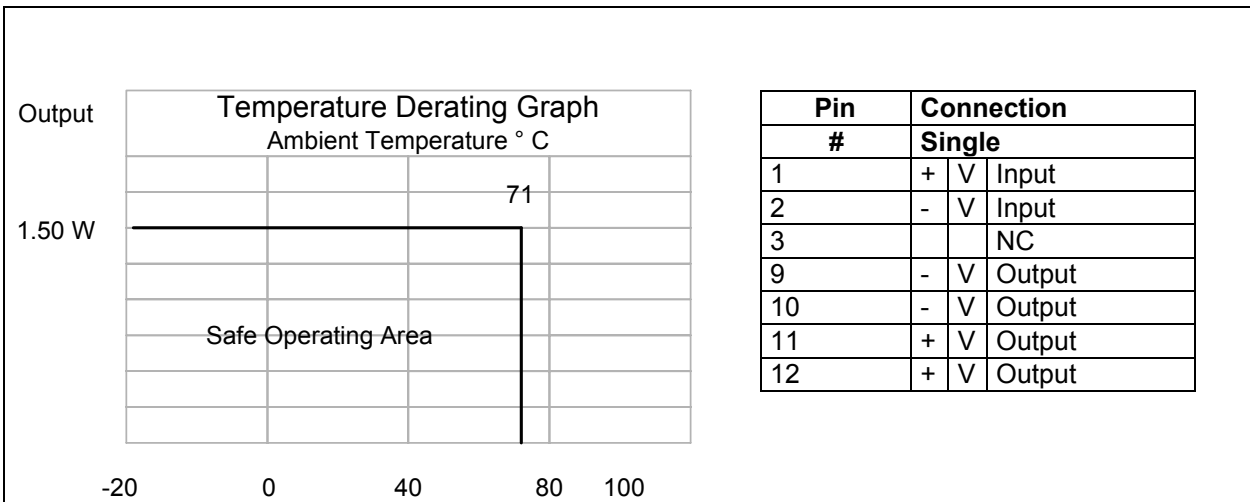

Specification can be changed without notice.

Copyright PEAK electronics GmbH