

MZ SERIES

PZ8GGxxxxZ 0.5 KV ISOLATED 1.5 W REGULATED DUAL OUTPUT SIP12

Available Inputs:

5, 12 and 15 VDC

Available Outputs:

5, 12 and 15 VDC

Other specifications please enquire.

Electrical Specifications

(Typical at + 25° C, nominal input voltage, rated output current unless otherwise specified)

Input Specifications

Voltage range +/- 10 %

Filter Capacitors

Isolation Specifications

Rated voltage 500 VDC

Resistance 1000 MOhm

Output Specifications

Voltage accuracy +/- 3 %, max.

Ripple and noise (at 20 MHz BW) 50 mV p-p, max.

Short circuit protection Momentary

Line voltage regulation +/- 0.5 %

Load voltage regulation +/- 0.5 %

Temperature coefficient +/- 0,02 % / °C

General Specifications

Efficiency 55 % min.

Switching frequency 40 KHz, typ.

Environmental Specifications

Operating temperature (ambient) - 20° C to + 71° C

Storage temperature - 25 °C to + 125 °C

Derating See graph

Humidity Up to 90 %, non condensing

Cooling Free air convection

Physical Characteristics

Dimensions 34.25 x 10.00 x 13.95 mm


1.35 x 0.40 x 0.55 inches

Case material Non conductive black plastic


Examples of Partnumbers

PART NO.	INPUT VOLTAGE (VDC)	OUTPUT VOLTAGE (VDC)	OUTPUT CURRENT (max. mA)
PZ8GG-0505Z	5	+/- 5	+/- 150
PZ8GG-0512Z	5	+/- 12	+/- 63
PZ8GG-0515Z	5	+/- 15	+/- 50
PZ8GG-1205Z	12	+/-5	+/- 150
PZ8GG-1212Z	12	+/- 12	+/- 63
PZ8GG-1215Z	12	+/- 15	+/- 50
PZ8GG-1505Z	15	+/- 5	+/- 150
PZ8GG-1512Z	15	+/- 12	+/- 63
PZ8GG-1515Z	15	+/- 15	+/- 50

Dimensions

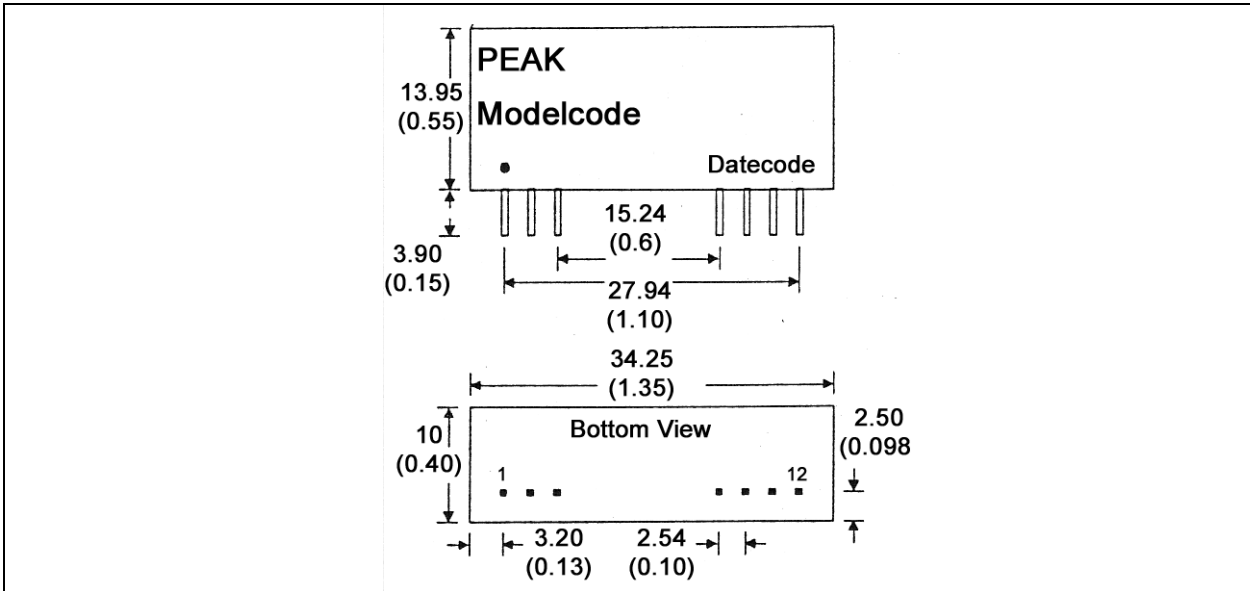

Derating Graph and Pinning

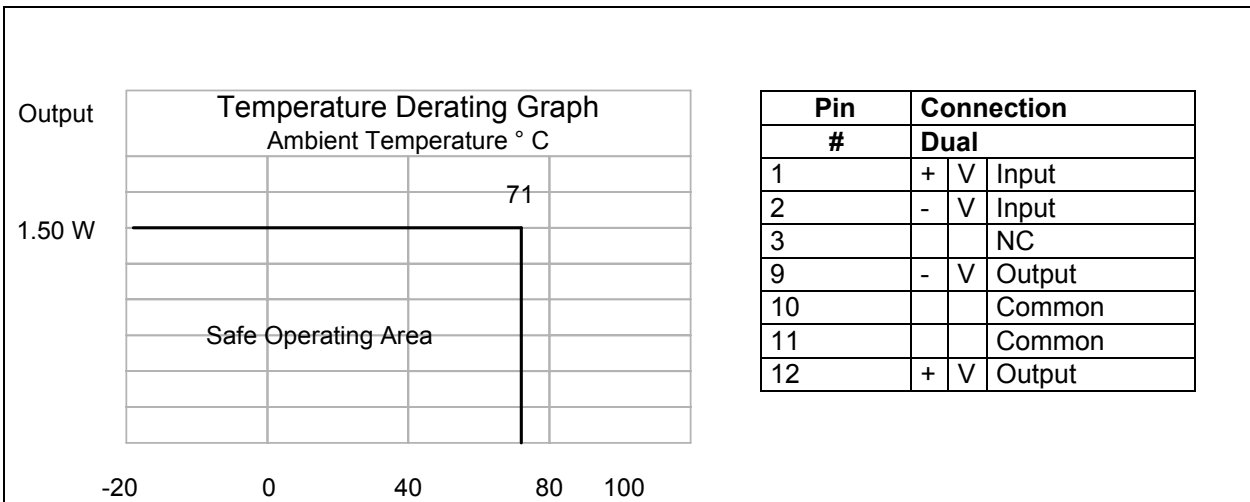

Specification can be changed without notice.

Copyright PEAK electronics GmbH