

RGA Series

Features

- 105°C, 2,000 hours assured
- 105°C standard series for general purposes
- RoHS Compliance
- If there is any requirement on ESR, it's suggested to use low ESR series instead of RGA. Please consult us for any inquiry.




Sleeve & Marking Color: Black & White

Specifications

Items	Performance																																																																													
Category Temperature Range	6.3~400V	450V																																																																												
	-40°C ~ +105°C	-25°C ~ +105°C																																																																												
Capacitance Tolerance	±20% (at 120Hz, 20°C)																																																																													
Leakage Current (at 20°C)	<table border="1"> <thead> <tr> <th>Rated voltage</th> <th>≤ 100V</th> <th>> 100V</th> </tr> </thead> <tbody> <tr> <td>Time</td> <td>after 2 minutes</td> <td>after 5 minutes</td> </tr> <tr> <td>Leakage Current</td> <td>I = 0.01CV or 3 (μA) whichever is greater</td> <td>CV ≤ 1,000 I = 0.03CV + 15(μA) CV > 1,000 I = 0.02CV + 25(μA)</td> </tr> </tbody> </table> <p>Where, C = rated capacitance in μF V = rated DC working voltage in V</p>		Rated voltage	≤ 100V	> 100V	Time	after 2 minutes	after 5 minutes	Leakage Current	I = 0.01CV or 3 (μA) whichever is greater	CV ≤ 1,000 I = 0.03CV + 15(μA) CV > 1,000 I = 0.02CV + 25(μA)																																																																			
	Rated voltage	≤ 100V	> 100V																																																																											
Time	after 2 minutes	after 5 minutes																																																																												
Leakage Current	I = 0.01CV or 3 (μA) whichever is greater	CV ≤ 1,000 I = 0.03CV + 15(μA) CV > 1,000 I = 0.02CV + 25(μA)																																																																												
Tanδ (at 120 Hz, 20°C)	<table border="1"> <thead> <tr> <th>Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td>Tanδ (max)</td> <td>0.23</td> <td>0.20</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> <td>0.10</td> <td>0.09</td> <td>0.08</td> <td>0.12</td> <td>0.14</td> <td>0.17</td> <td>0.20</td> <td>0.25</td> <td>0.25</td> </tr> </tbody> </table> <p>When the capacitance exceeds 1,000μF, 0.02 shall be added every 1,000μF increase.</p>		Rated Voltage	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	Tanδ (max)	0.23	0.20	0.16	0.14	0.12	0.10	0.09	0.08	0.12	0.14	0.17	0.20	0.25	0.25																																														
Rated Voltage	6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																																																																
Tanδ (max)	0.23	0.20	0.16	0.14	0.12	0.10	0.09	0.08	0.12	0.14	0.17	0.20	0.25	0.25																																																																
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.																																																																													
	<table border="1"> <thead> <tr> <th colspan="2">Rated Voltage</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> <th>160</th> <th>200</th> <th>250</th> <th>350</th> <th>400</th> <th>450</th> </tr> </thead> <tbody> <tr> <td rowspan="4">Impedance Ratio</td> <td>Z(-25°C)</td> <td>φ D < 16</td> <td>4</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> <td>3</td> <td>6</td> <td>8</td> <td>12</td> <td>14</td> <td>16</td> </tr> <tr> <td>/Z(+20°C)</td> <td>φ D ≥ 16</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> <td>3</td> <td>4</td> <td>8</td> <td>10</td> <td>16</td> <td>18</td> <td>-</td> </tr> <tr> <td>Z(-40°C)</td> <td>φ D < 16</td> <td>8</td> <td>6</td> <td>6</td> <td>4</td> <td>4</td> <td>3</td> <td>3</td> <td>4</td> <td>8</td> <td>10</td> <td>16</td> <td>18</td> <td>-</td> </tr> <tr> <td>/Z(+20°C)</td> <td>φ D ≥ 16</td> <td>12</td> <td>10</td> <td>8</td> <td>8</td> <td>8</td> <td>8</td> <td>6</td> <td>6</td> <td>4</td> <td>8</td> <td>10</td> <td>16</td> <td>18</td> </tr> </tbody> </table>		Rated Voltage		6.3	10	16	25	35	50	63	100	160	200	250	350	400	450	Impedance Ratio	Z(-25°C)	φ D < 16	4	3	3	2	2	2	2	3	6	8	12	14	16	/Z(+20°C)	φ D ≥ 16	6	4	4	3	3	3	3	4	8	10	16	18	-	Z(-40°C)	φ D < 16	8	6	6	4	4	3	3	4	8	10	16	18	-	/Z(+20°C)	φ D ≥ 16	12	10	8	8	8	8	6	6	4	8	10	16
Rated Voltage		6.3	10	16	25	35	50	63	100	160	200	250	350	400	450																																																															
Impedance Ratio	Z(-25°C)	φ D < 16	4	3	3	2	2	2	2	3	6	8	12	14	16																																																															
	/Z(+20°C)	φ D ≥ 16	6	4	4	3	3	3	3	4	8	10	16	18	-																																																															
	Z(-40°C)	φ D < 16	8	6	6	4	4	3	3	4	8	10	16	18	-																																																															
	/Z(+20°C)	φ D ≥ 16	12	10	8	8	8	8	6	6	4	8	10	16	18																																																															
Endurance	<table border="1"> <thead> <tr> <th>Test Time</th> <th>2,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>Within ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 2,000 hours at 105°C.</p>		Test Time	2,000 Hrs	Capacitance Change	Within ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value																																																																				
	Test Time	2,000 Hrs																																																																												
Capacitance Change	Within ±20% of initial value																																																																													
Tanδ	Less than 200% of specified value																																																																													
Leakage Current	Within specified value																																																																													
Shelf Life Test	<table border="1"> <thead> <tr> <th>Test Time</th> <th>1,000 Hrs</th> </tr> </thead> <tbody> <tr> <td>Capacitance Change</td> <td>With in ±20% of initial value</td> </tr> <tr> <td>Tanδ</td> <td>Less than 200% of specified value</td> </tr> <tr> <td>Leakage Current</td> <td>Within specified value</td> </tr> </tbody> </table> <p>* The above Specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105 °C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements for 160 ~ 450V (Refer to JIS C 5101-4 4.1).</p>		Test Time	1,000 Hrs	Capacitance Change	With in ±20% of initial value	Tanδ	Less than 200% of specified value	Leakage Current	Within specified value																																																																				
	Test Time	1,000 Hrs																																																																												
Capacitance Change	With in ±20% of initial value																																																																													
Tanδ	Less than 200% of specified value																																																																													
Leakage Current	Within specified value																																																																													
Ripple Current & Frequency Multipliers	<table border="1"> <thead> <tr> <th rowspan="2">Cap. (μF)</th> <th colspan="6">Freq. (Hz)</th> </tr> <tr> <th>60 (50)</th> <th>120</th> <th>500</th> <th>1k</th> <th>10k up</th> <th></th> </tr> </thead> <tbody> <tr> <td>Under 100</td> <td>0.70</td> <td>1.00</td> <td>1.30</td> <td>1.40</td> <td>1.50</td> <td></td> </tr> <tr> <td>100 < C ≤ 1,000</td> <td>0.75</td> <td>1.00</td> <td>1.20</td> <td>1.30</td> <td>1.35</td> <td></td> </tr> <tr> <td>1,000 up above</td> <td>0.80</td> <td>1.00</td> <td>1.10</td> <td>1.12</td> <td>1.15</td> <td></td> </tr> </tbody> </table>		Cap. (μF)	Freq. (Hz)						60 (50)	120	500	1k	10k up		Under 100	0.70	1.00	1.30	1.40	1.50		100 < C ≤ 1,000	0.75	1.00	1.20	1.30	1.35		1,000 up above	0.80	1.00	1.10	1.12	1.15																																											
Cap. (μF)	Freq. (Hz)																																																																													
	60 (50)	120	500	1k	10k up																																																																									
Under 100	0.70	1.00	1.30	1.40	1.50																																																																									
100 < C ≤ 1,000	0.75	1.00	1.20	1.30	1.35																																																																									
1,000 up above	0.80	1.00	1.10	1.12	1.15																																																																									

Diagram of Dimensions

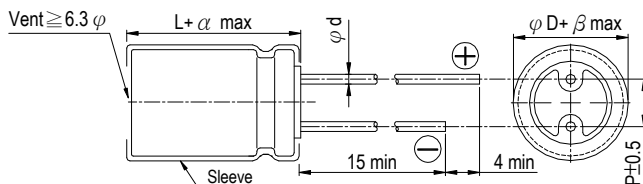


Lead Spacing and Diameter

Unit: mm

	φ D	5	6.3	8	10	12.5	16	18	22	25
P	2.0	2.5	3.5	5.0	5.0	7.5	7.5	10	12.5	
φ d	0.5	0.6						0.8	1.0	
α	L < 20: 1.5, L ≥ 20: 2.0									2.0
β	0.5									

The case size of 12.5×16, 16×16, 16×20, 18×16, 18×20 and 18×25 are suitable for below diagram:

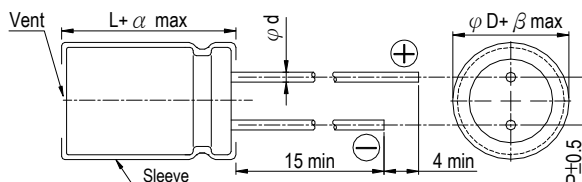



Dimension: $\phi D \times L(\text{mm})$
Ripple Current: mA/rms at 120 Hz, 105°C

Dimension & Permissible Ripple Current

μF	Contents	6.3V (0J)		10V (1A)		16V (1C)		25V (1E)		35V (1V)		50V (1H)		63V (1J)		100V (2A)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
2.2	2R2											5×11	20			5×11	30
3.3	3R3											5×11	30			5×11	31
4.7	4R7											5×11	33			5×11	36
10	100											5×11	50			6.3×11	54
22	220											5×11	78	6.3×11	86	6.3×11	93
33	330									5×11	75	5×11	90	6.3×11	100	8×11.5	99
47	470							5×11	97	5×11	90	6.3×11	120	6.3×11	130	10×12.5	165
100	101					5×11	110	6.3×11	142	6.3×11	150	8×11.5	188	10×12.5	235	10×20	265
220	221	5×11	140	6.3×11	175	6.3×11	190	8×11.5	236	8×11.5	270	10×12.5	300	10×16	335	12.5×25	440
330	331			6.3×11	200	8×11.5	270	8×11.5	310	10×12.5	350	10×16	410	10×20	510	16×25	620
470	471	6.3×11	230	8×11.5	290	8×11.5	310	10×12.5	380	10×16	460	10×20	530	12.5×20	640	16×31.5	715
1,000	102	8×11.5	380	10×12.5	460	10×16	560	10×20	680	12.5×20	810	12.5×25	950	16×25	930	18×40	1,275
2,200	222	10×16	690	10×20	760	12.5×16	780	12.5×25	1,110	16×25	1,260	16×35.5	1,470	18×40	2,280	25×45	2,400
3,300	332	10×20	840	12.5×20	1,100	12.5×25	1,170	16×25	1,440	16×31.5	1,420	18×35.5	1,770	22×40	2,510		
4,700	472	12.5×20	1,090	12.5×25	1,260	16×20	1,185	16×31.5	1,650	18×25	1,550	18×35.5	1,900	22×40	2,340	25×40	3,000
6,800	682	12.5×25	1,460	16×16	1,060	16×20	1,270	16×31.5	1,930	16×40	2,000	18×40	2,250	25×40	2,530		
10,000	103	16×20	1,340	16×31.5	2,220	16×35.5	2,210	22×40	2,720	18×25	1,800						
15,000	153	16×31.5	2,365	18×25	2,290	16×35.5	2,590	18×40	2,950	25×40	3,200						
22,000	223	16×40	2,800	18×35.5	2,930	18×40	3,230	22×40	3,460								
33,000	333	18×45	3,080	22×40	4,090	25×45	4,500										

μF	Contents	160V (2C)		200V (2D)		250V (2E)		350V (2V)		400V (2G)		450V (2W)	
		$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA	$\phi D \times L$	mA
1	010									6.3×11	21	8×11.5	27
2.2	2R2			6.3×11	30	6.3×11	35	6.3×11	35	8×11.5	39	8×11.5	39
3.3	3R3			6.3×11	39	6.3×11	40	8×11.5	43	8×11.5	45	8×11.5	45
4.7	4R7			6.3×11	43	8×11.5	45	8×11.5	45	8×11.5	50	8×11.5	50
10	100	8×11.5	65	8×11.5	65	10×12.5	92	10×16	95	10×16	95	10×20	105
22	220	10×12.5	110	10×16	140	10×16	140	12.5×20	220	12.5×20	160	12.5×20	160
33	330	10×16	150	10×20	170	12.5×16	175	12.5×25	215	16×20	225	16×20	225
47	470	10×20	195	12.5×16	215	12.5×20	230	16×16	205	16×20	295	18×16	220
68	680	12.5×20	275	12.5×20	265	16×20	320	16×20	255	16×25	295	16×25	280
100	101	12.5×25	355	16×16	290	16×20	320	16×31.5	370	18×25	360	16×35.5	400
150	151	16×25	470	18×16	360	16×20	320	18×25	360	16×31.5	375	18×31.5	420
220	221	16×31.5	660	18×20	510	16×25	360	18×20	400	18×35.5	540	18×40	560
330	331	18×35.5	820	18×16	360	18×20	415	16×35.5	430	18×35.5	540	18×40	560
470	330	22×40	1,130	18×20	510	16×31.5	550	18×40	600	22×40	730	22×40	770
				18×25	535	18×20	415	16×35.5	430	22×40	730	22×40	770
				18×35.5	750	18×20	415	16×35.5	430	25×40	865		
				22×40	965	18×20	415	16×35.5	430	22×45	930		
				25×40	1,140	22×40	1,140	25×45	1,070				
				1,325									

Part Numbering System

RGA series 470 μF $\pm 20\%$ 6.3V Bulk Package Gas Type 6.3 $\phi \times 11\text{L}$ Pb-free and PET sleeve

RGA **471** **M** **0J** **BK** - **0611**

Series Capacitance Capacitance Tolerance Rated Voltage Lead Configuration & Package Rubber Type Case Size Lead Wire and Sleeve type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 10.

RGL Series

Features

- 105°C, for general purposes
- 8φ ~ 18φ with large permissible ripple current
- Slim type included
- RoHS Compliance




Sleeve & Marking Color: Black & Golden

Specifications

Items	Performance					
Category Temperature Range	400V			420 ~ 450V		
	-40°C ~ +105°C			-25°C ~ +105°C		
Capacitance Tolerance	±20% (at 120Hz, 20°C)					
Leakage Current (at 20°C)	Time		after 5 minutes			
	Leakage Current		CV ≤ 1,000 I = 0.03CV + 15(μA)	CV > 1,000 I = 0.02CV + 25(μA)		
Where, C = rated capacitance in μF V = rated DC working voltage in V						
Tanδ (at 120Hz, 20°C)	Rated Voltage		400	420	450	
	Tanδ (max)		0.24	0.24	0.24	
Low Temperature Characteristics (at 120Hz)	Impedance ratio shall not exceed the values given in the table below.					
	Rated Voltage		400	420	450	
	Impedance Ratio	Z(-25°C)/Z(+20°C)	5	6	6	
		Z(-40°C)/Z(+20°C)	6	-	-	
Endurance	Test Time		2,000 Hrs			
	Capacitance Change		Within ±20% of initial value			
	Tanδ		Less than 200% of specified value			
	Leakage Current		Within specified value			
* The above Specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage applied with rated ripple current for 2,000 hours at 105°C.						
Shelf Life Test	Test Time		1,000 Hrs			
	Capacitance Change		With in ±20% of initial value			
	Tanδ		Less than 200% of specified value			
	Leakage Current		Within specified value			
* The above Specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. The rated voltage shall be applied to the capacitors before the measurements (Refer to JIS C 5101-4 4.1).						
Ripple Current & Frequency Multipliers	Frequency (Hz)	60	120	500	1k	10k up
	Multipliers	0.8	1.00	1.25	1.45	1.50

Diagram of Dimensions

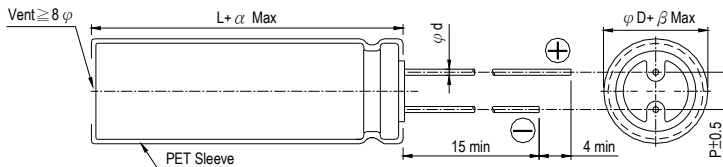

Lead Spacing and Diameter

Unit: mm

φD	8	10	12.5	16	18
P	3.5	5.0	5.0	7.5	7.5
φd	0.6		0.8		
α	2.0				
β	0.5				



Dimension & Permissible Ripple Current Dimension: $\phi D \times L$ (mm)
Ripple Current: mA/rms at 105°C

V. DC	Cap. (μ F)	8 ϕ			10 ϕ			12.5 ϕ			16 ϕ			18 ϕ		
		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current		$\phi D \times L$	Ripple Current	
			120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz		120 Hz	100k Hz
400V (2G)	15	8×30	190	285												
	22	8×35	250	375												
	27	8×40	300	450	10×30	245	370									
	33	8×45	350	525	10×35	295	445									
	39	8×50	390	585	10×40	345	515									
	47				10×45	400	600									
	56				10×50	450	675	12.5×30	470	705						
	68							12.5×35	540	810						
	82							12.5×40	620	930						
	100															
	120										16×35.5 16×40	800 840	1,200 1,260			
	150										16×45	940	1,410	18×35.5	920	1,380
180										16×50	1,050	1,575	18×40	1,060	1,590	
220													18×45	1,200	1,800	
420V (2P)	15	8×30	195	293												
	22	8×35	255	383												
	27	8×45	320	480	10×30	245	370									
	33	8×50	370	555	10×35	295	445									
	39				10×40	345	515									
	47				10×45	400	600									
	56				10×50	450	675	12.5×30	470	705						
	68							12.5×35	540	810						
	82							12.5×45	630	945						
	100							12.5×50	730	1,095	16×35.5	730	1,095			
	120										16×40 16×45	840 885	1,260 1,330	18×35.5	850	1,275
	150										16×50	1030	1,545	18×35.5 18×40	920 960	1,380 1,440
180													18×45	1,100	1,650	
220													18×50	1,220	1,830	
450V (2W)	15	8×30	195	293												
	22	8×40	270	405	10×30	225	330									
	27	8×45	320	480	10×35	265	400									
	33	8×50	370	555	10×40	315	475									
	39				10×45	360	545	12.5×30	400	600						
	47				10×50	420	625	12.5×35	460	690						
	56							12.5×40	520	780						
	68							12.5×45	580	870						
	82							12.5×50	660	990	16×35.5	660	990			
	100										16×40	750	1,125			
	120										16×45	840	1,260	18×35.5	820	1,230
	150										16×50	980	1,470	18×45	995	1,490
180													18×50	1,140	1,710	

Remark: Other sizes and specification are available, please contact us for detail.

Part Numbering System

RGL series 22 μ F \pm 20% 450V Bulk Package Gas Type 10 ϕ ×30L Pb-free and PET sleeve

RGL **220** **M** **2W** **BK** - **1030**

Series Capacitance Capacitance Tolerance Rated Voltage Lead Configuration & Package Rubber Type Case Size Lead Wire and Sleeve type

Note: For more details, please refer to "Part Numbering System (Radial Type)" on page 10.