

Features

Regulated Converters

- 2:1 Input Voltage Range
- 1.6kVDC Isolation
- UL Certified
- Efficiency up to 88%
- Six-Sided Continuous Shield
- Fixed Operating Frequency



RP15-F

15 Watt
2" x 1"
Single & Dual
Output



Description

The RP15-F series DC/DC converters are certified to UL 60950-1 and to cUL 60950-1. This makes them ideal for all telecom and industrial applications where approved safety standards are required. The industry standard 2" x 1" package meets military standards for thermal shock and vibration tolerance.

Selection Guide


Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [mA]	Input ⁽¹⁾ Current [mA]	Efficiency ⁽¹⁾ typ. [%]	Max. Capacitive Load ⁽²⁾ [μF]
RP15-123.3SF ^(3,4)	9-18	3.3	4000	1392	79	10200
RP15-1205SF ^(3,4)	9-18	5	3000	1524	82	7050
RP15-1212SF ^(3,4)	9-18	12	1250	1453	86	1035
RP15-1215SF ^(3,4)	9-18	15	1000	1453	86	705
RP15-243.3SF ^(3,4)	18-36	3.3	4000	688	80	10200
RP15-2405SF ^(3,4)	18-36	5	3000	744	84	7050
RP15-2412SF ^(3,4)	18-36	12	1250	735	85	1035
RP15-2415SF ^(3,4)	18-36	15	1000	735	85	705
RP15-483.3SF ^(3,4)	36-75	3.3	4000	340	81	10200
RP15-4805SF ^(3,4)	36-75	5	3000	377	83	7050
RP15-4812SF ^(3,4)	36-75	12	1250	359	87	1035
RP15-4815SF ^(3,4)	36-75	15	1000	363	86	705
RP15-1205DF ^(3,4)	9-18	±5	±1500	1506	83	±1020
RP15-1212DF ^(3,4)	9-18	±12	±625	1453	86	±495
RP15-1215DF ^(3,4)	9-18	±15	±500	1488	84	±165
RP15-2405DF ^(3,4)	18-36	±5	±1500	744	84	±1020
RP15-2412DF ^(3,4)	18-36	±12	±625	727	86	±495
RP15-2415DF ^(3,4)	18-36	±15	±500	727	86	±165
RP15-4805DF ^(3,4)	36-75	±5	±1500	368	85	±1020
RP15-4812DF ^(3,4)	36-75	±12	±625	355	88	±495
RP15-4815DF ^(3,4)	36-75	±15	±500	359	87	±165

Notes:

- Note1: Maximum value at nominal input voltage and full load.
Note2: Test by minimum Vin and constant resistor load.



Model Numbering

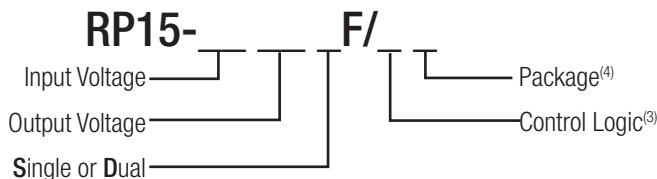

Ordering Examples

- RP15-2405SF/P = 24V Input, 5V Output, Positive Logic CTRL pin fitted
RP15-4805DF-HC = 48V Input, ±5V Output, No CTRL pin, Heat-sink fitted

Notes:

- Note3: Standard part is without suffixes and Trim and CTRL pins aren't fitted.
add suffix "P" for CTRL function with positive logic (1=ON, 0=OFF)
add suffix "N" for CTRL function with negative logic (0=ON, 1=OFF)
Note4: add suffix -HC for premounted Heat-sink and clips

UL60950-1 Certified

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted


BASIC CHARACTERISTICS					
Parameter	Condition		Min.	Typ.	Max.
Input Voltage Range	nom. Vin = 12V nom. Vin = 24V nom. Vin = 48V		9VDC 18VDC 36VDC	12VDC 24VDC 48VDC	18VDC 36VDC 75VDC
Under Voltage Lockout (UVLO)			none		
Input Filter					Pi-Type
Input Reflected Ripple Current ⁽⁶⁾	nominal Vin and full load			20mA _{p-p}	
Input Surge Voltage	Vin = 12V, 100ms max. Vin = 24V, 100ms max. Vin = 48V, 100ms max.				36VDC 50VDC 100VDC
Start-up time	Power up			20ms	
Operating Frequency Range	measured by 20MHz bandwidth	Single	450kHz	500kHz	550kHz
		Dual	270kHz	300kHz	330kHz
Minimum Load ⁽⁷⁾	of full load		10%		
Ripple and Noise	Single Dual			50mV _{p-p} 75mV _{p-p}	
Remote ON/OFF ⁽⁸⁾	Positive logic	DC-DC ON DC-DC OFF	Open or 3.5V < Vr < 12V Short or 0V < Vr < 1.2V		
	Negative Logic	DC-DC ON DC-DC OFF	Short or 0V < Vr < 1.2V Open or 3.5V < Vr < 12V		
Input current of Remote pin (CTRL)	DC-DC OFF			20mA	
	DC-DC ON		-0.5mA		+1.0mA

Notes:


- Note6: Simulated source impedance of 12μH. 12μH inductor in series with +Vin.
- Note7: The RP15 series requires a minimum of 10% loading on the output to maintain specified regulation. Operation under no-load condition will not damage these devices, however they may not meet all listed specification.
- Note8: The ON/OFF control function can be positive or negative logic. The pin voltage is referenced to -Vin pin.

RP15-1205SF

Efficiency vs. Output Current




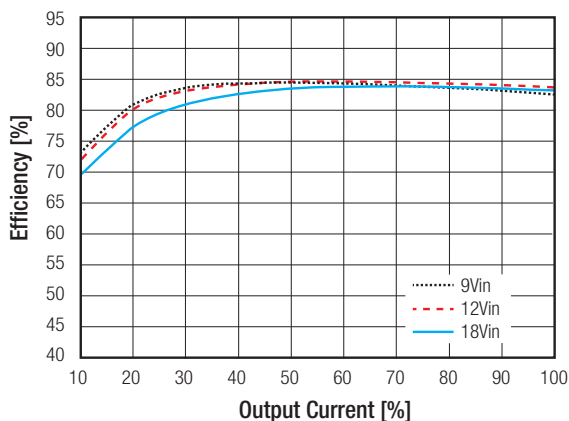


Efficiency vs. Input Voltage

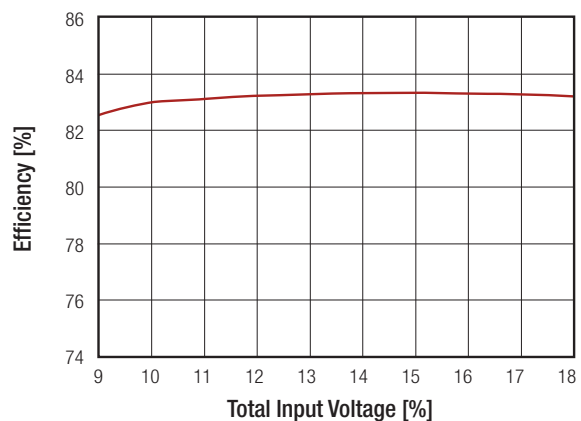

continued on next page

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

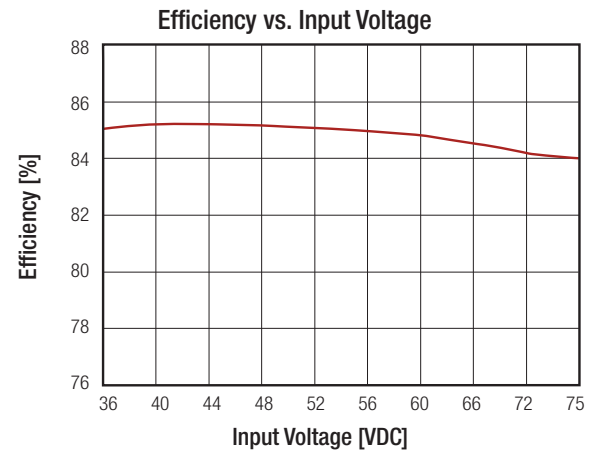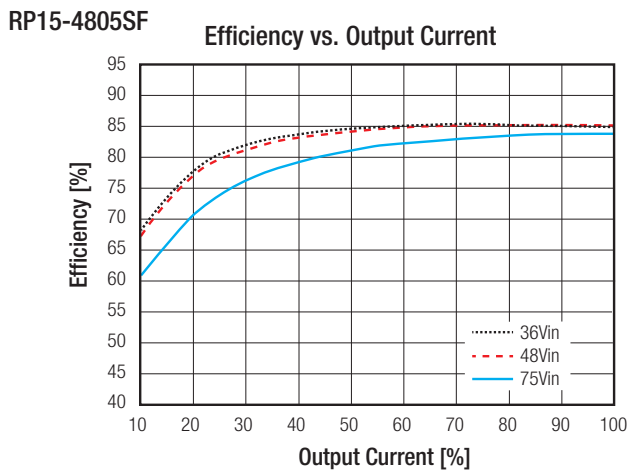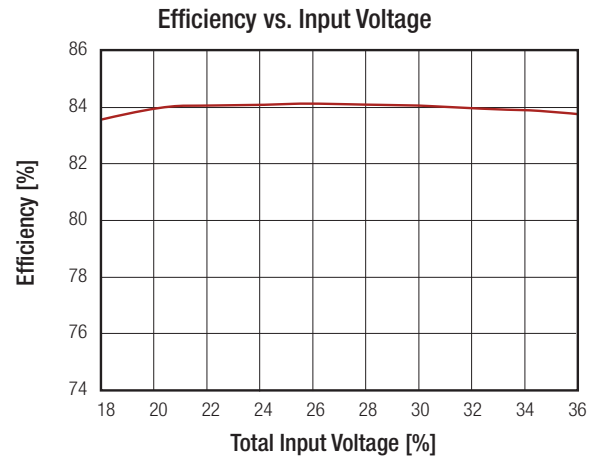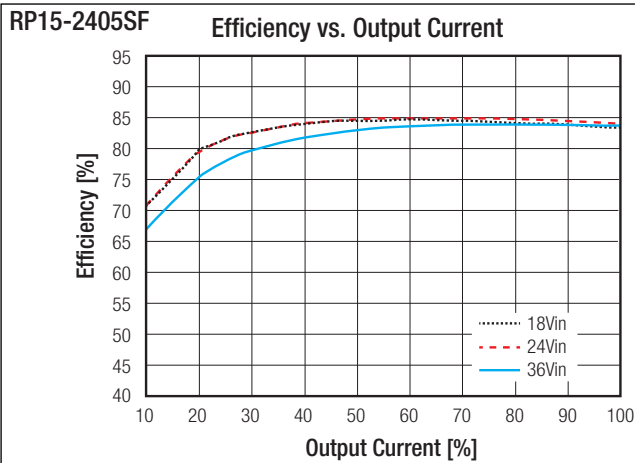

REGULATIONS

Parameter	Condition	Value	
Output Voltage Accuracy	full load and nominal Vin	±1%	
Line Voltage Regulation	low line to high line at full load	±0.5%	
Load Voltage Regulation	10% to 100% load	Single	±0.5%
		Dual	±0.1%
Cross Regulation	asymmetrical 25% <-> 100% load	±5%	
Transient Response recovery time	25% load step change	250µs typ.	

PROTECTIONS

Parameter	Condition	Value	
Short Circuit Protection (SCP)		continuous, automatic recovery	
Over Voltage Protection (OVP)	Zener Diode Clamp	3.3Vout	3.9V
		5Vout	6.2V
		12Vout	15V
		15Vout	18V
Over Load Protection (OLP)	% of lout rated	150% typ.	
Isolation Voltage	I/P to O/P	1.6kVDC/1 minute	
	I/P (O/P) to case	1.6kVDC/1 minute	
Isolation Resistance	500VDC	1GΩ min.	
Isolation Capacitance		300pF typ.	

Notes:



Note9: This power module is not internally fused. An input line fuse must always be used.

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

ENVIRONMENTAL

Parameter	Condition	Value
Operating Temperature Range	without derating	-40°C to +75°C
	with derating	-40°C to +100°C
Maximum Case Temperature		+100°C
Temperature Coefficient		±0.02%/°C max.
Thermal Impedance	Natural convection (20LFM)	12°C/Watt
	Natural convection (20LFM) with Heat-sink	10°C/Watt
Operating Humidity		5% - 95% RH
Thermal Shock		MIL-STD-810F
Vibration		MIL-STD-810F
MTBF	MIL-HDBK-217F	2318 x 10 ³ hours
	Bellcore TR-NWT-000332 ⁽¹⁰⁾	2041 x 10 ³ hours

Derating Graph⁽¹¹⁾

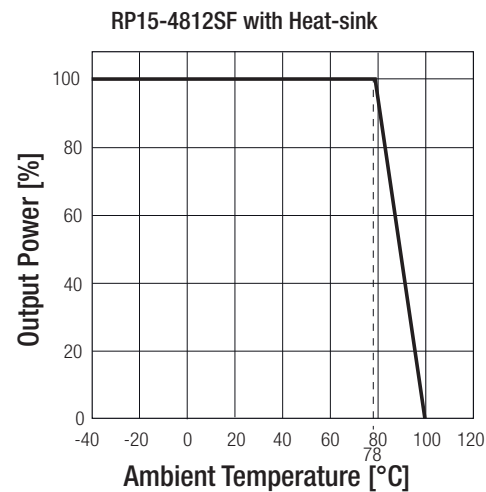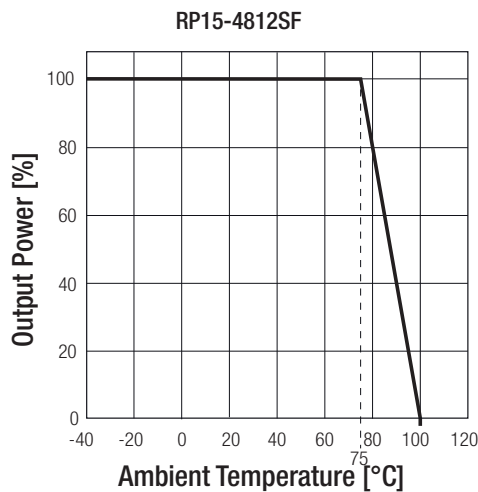

Notes:

Note10: BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment).

Note11: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical support service at techsupportAT@recom-power.com

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
UL General Safety	E196683	UL60950-1 1st Ed.: 2003 C22.2 No. 60950 1st. Ed.: 2003
EMC Compliance	Condition	Standard / Criterion
EMI Standard ⁽¹²⁾	with external filter	EN55022, Class A or B
ESD	Air ±8kV and Contact ± 6kV	EN61000-4-2, Criteria B
Radiated Immunity	v10 V/m	EN61000-4-3, Criteria A
Fast Transient ⁽¹³⁾	±2kV	EN61000-4-4, Criteria B
Surge ⁽¹³⁾	±1kV	EN61000-4-5, Criteria B
Conducted Immunity	10 Vr.m.s	EN61000-4-6, Criteria A

continued on next page



Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

Notes:

Note10: The standard modules meet EMI Class A or Class B with external components, see filter suggestions below.



Note11: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5. The filter capacitor Recom suggests: Nippon chemi-con KY series, 220 μF /100V.

EMI Filtering Class A

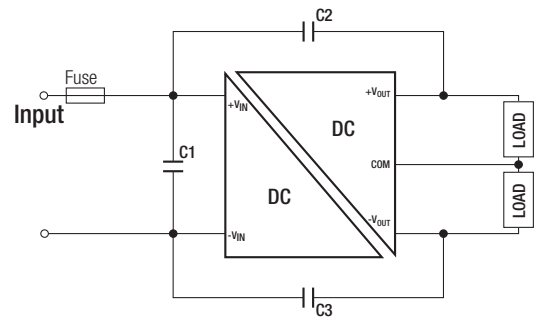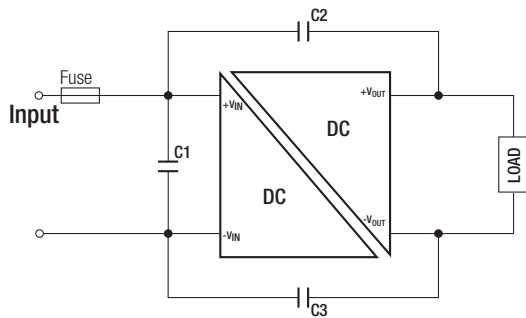

MODEL	C1	C2	C3
RP15-12xxS_DF	6.8 μF /50V 1812 MLCC	1000pF/2kV 1808 MLCC	1000pF/2kV 1808 MLCC
RP15-24xxS_DF	2.2 μF /50V 1812 MLCC	1000pF/2kV 1808 MLCC	1000pF/2kV 1808 MLCC
RP15-48xxS_DF	1.5 μF /100V 1812 MLCC	1000pF/2kV 1808 MLCC	1000pF/2kV 1808 MLCC

EMI Filtering Class B

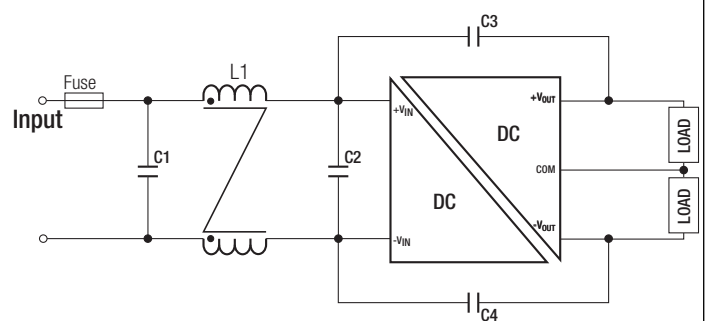
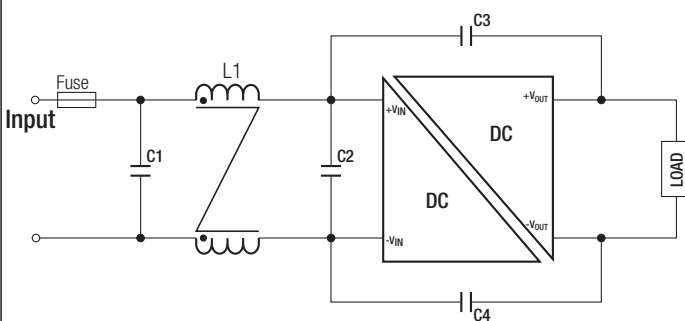


MODEL	C1	C2	C3/C4	L1
RP15-12xxS_DF	4.7 μF /50V 1812 MLCC	N/A	1000pF/2kV 1808 MLCC	CMC: 325 μH ref.: WE 744290321 ref.: CMC-06
RP15-24xxS_DF	3.3 μF /50V 1812 MLCC	N/A	1000pF/2kV 1808 MLCC	CMC: 325 μH ref.: WE 744290321 ref.: CMC-06
RP15-48xxS_DF	2.2 μF /100V 1812 MLCC	2.2 μF /100V 1812 MLCC	1000pF/2kV 1808 MLCC	CMC: 325 μH ref.: WE 744290321 ref.: CMC-06



Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

DIMENSIONS and PHYSICAL CHARACTERISTICS		
Parameter	Type	Value
Material	Case Base Potting	Nickel coated copper non-conductive black plastic Epoxy (UL94-V0)
Package Dimensions (LxWxH)	without Heat-sink with Heat-sink	50.8 x 25.4 x 10.2mm 56.8 x 25.4 x 16.8mm
Package Weight	without Heat-sink with Heat-sink	27g 37.89g

Dimension Drawing (mm)

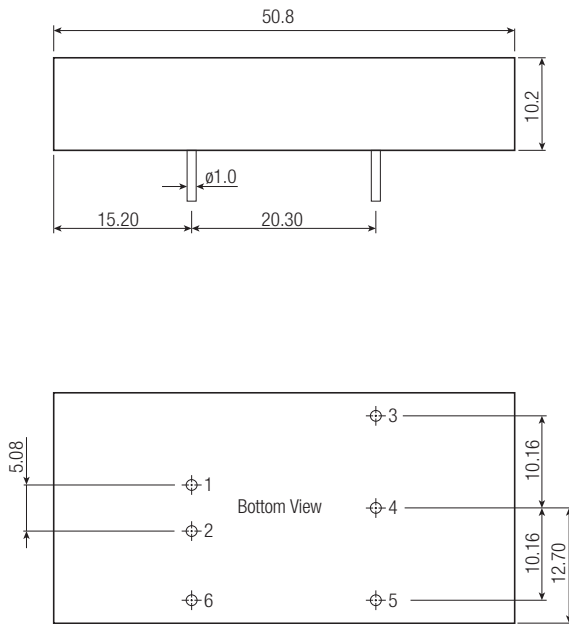

Dimension Drawing (mm) with Heat-sink

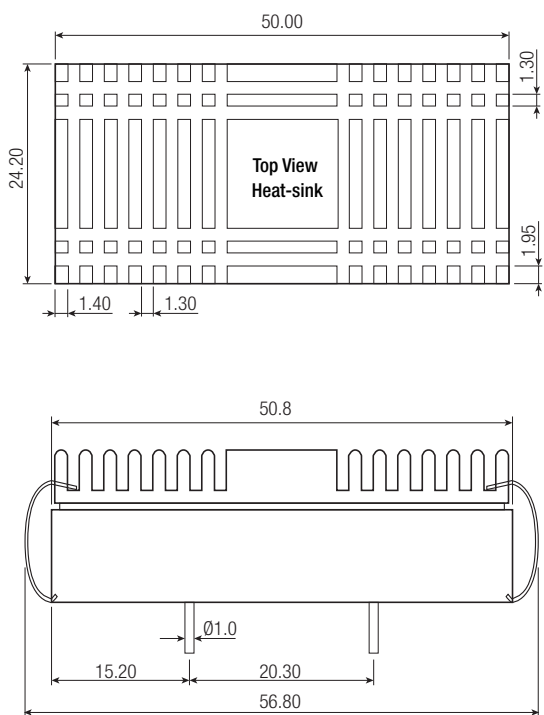

Pin Connections

Pin #	Single	Dual
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	No Pin	Com
5	-Vout	-Vout
6*	CTRL*	CTRL*

* Optional. See Note 8
Pin Pitch Tolerance ± 0.25 mm
Pin Dimension Tolerance ± 0.1 mm
X.X ± 0.5 mm
X.XX ± 0.25 mm

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

PACKAGING INFORMATION			
Parameter	Type		Value
Packaging Quantity	without Heat-sink	Tube	9pcs.
	with Heat-sink	Tray	20pcs.
Storage Temperature Range			-55°C to +125°C
Storage Humidity			5% - 95% RH