


### FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier
- majority carrier conduction
- Low power loss, High efficiency
- High current capability, low  $V_F$
- High surge capacity
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- High temperature soldering guaranteed:  
260 °C/10 seconds at terminals

### DPAK/TO-252AA

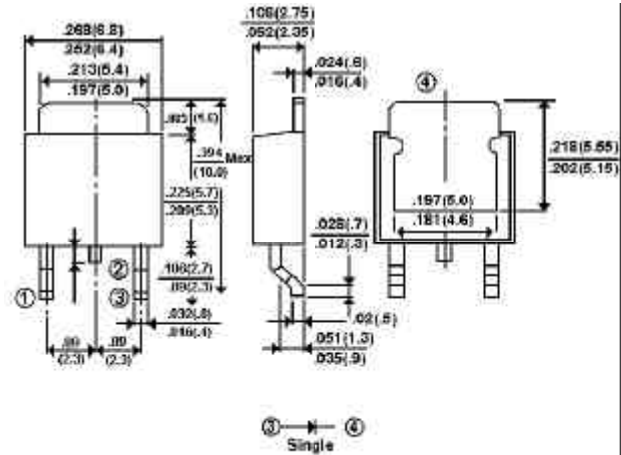

Dimensions in inches and (millimeters)

### MECHANICAL DATA

- Case: DPAK/TO-252AA molded plastic
- Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode
- Standard packaging: 16mm tape (EIA-481)
- Weight: 0.015 ounce, 0.4 gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Resistive or inductive load.

	SYMBOLS	SB320D	SB330D	SB340D	SB350D	SB360D	UNITS
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	30	40	50	60	Volts
Maximum RMS Voltage	$V_{RMS}$	14	21	28	35	42	Volts
Maximum DC Blocking Voltage	$V_{DC}$	20	30	40	50	60	Volts
Maximum Average Forward Rectified Current at $T_C=75$ °C	$I_{(AV)}$	3.0					Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	75.0					Amps
Maximum Instantaneous Forward Voltage at 3.0A (Note 1)	$V_F$	0.50			0.65		Volts
Maximum DC Reverse Current $T_A=25$ °C (Note 1) At Rated DC Blocking Voltage $T_A=100$ °C	$I_R$	0.2 20.0					mA
Maximum Thermal Resistance (Note 2)	$R_{\theta KJL}$ $R_{\theta KJA}$	6.0 80.0					°C/W
Operating Junction Temperature Range	$T_J$	-50 to +125					°C
Storage Temperature Range	$T_{STG}$	-50 to +150					°C

### NOTES:

1. Pulse Test with  $PW=300$  µsec, 2% Duty Cycle.
2. Mounted on P.C.Board with  $14mm^2$  (.013mm thick) copper pad areas.

RATING AND CHARACTERISTIC CURVES

SB320D THRU SB360D

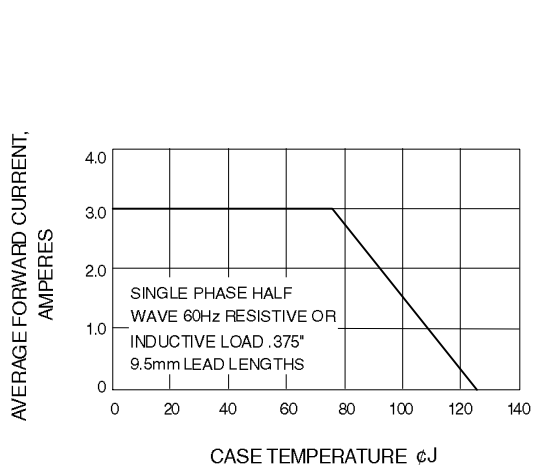


Fig. 1-FORWARD CURRENT DERATING CURVE

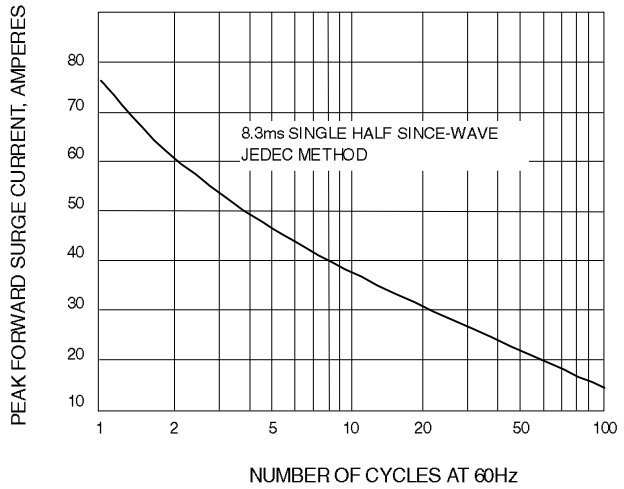


Fig. 2-MAXIMUM NON-REPETITIVE SURGE CURRENT

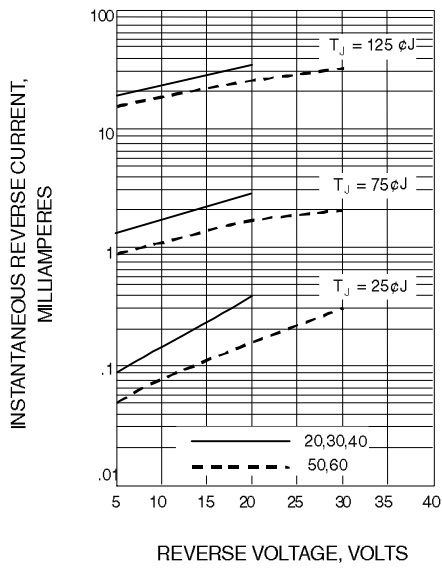


Fig. 3-TYPICAL REVERSE CHARACTERISTICS

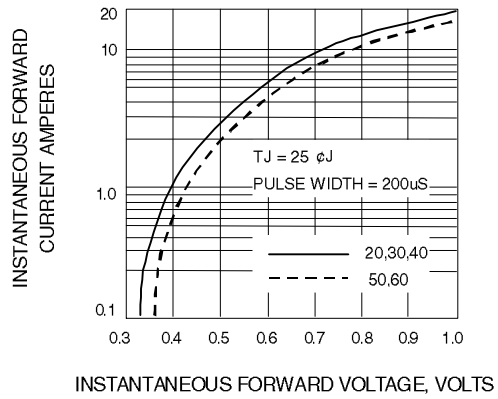


Fig. 4-TYPICAL FORWARD CHARACTERISTICS

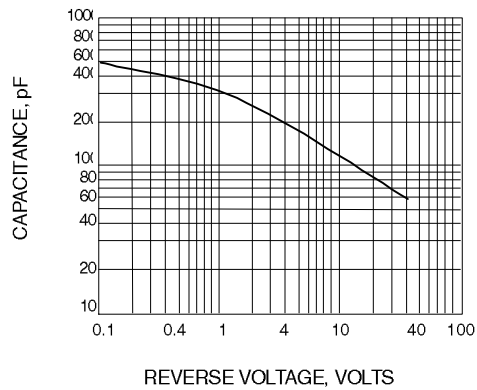


Fig. 5-TYPICAL JUNCTION CAPACITANCE