

**SCHOTTKY DIE SPECIFICATION**

TYPE: SB360

General Description: 60 V 3A Standard VF

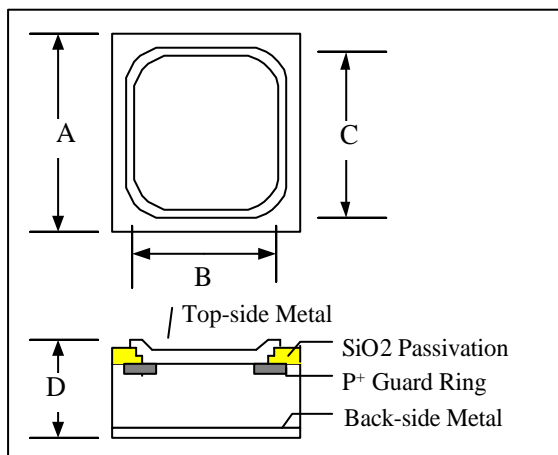
Single Anode

ELECTRICAL CHARACTERISTICS	SYM	Spec. Limit	Die Sort	UNIT
DC Blocking Voltage: $I_r=1mA$ (for wafer form)	VRRM	60	63	Volt
$I_r=0.5mA$ (for dice form)				
Average Rectified Forward Current	IFAV	3		Amp
Maximum Instantaneous Forward Voltage				
@ 3 Amperes, $T_a=25v$	VF MAX	0.65	0.64	Volt
Maximum Instantaneous Reverse Voltage				
$V_R= 60$ Volt, $T_a=25v$	IR MAX	0.3	0.25	mA
Maximum Junction Capacitance @ 0V, 1MHZ	Cj MAX			pF
<b>MAXIMUM RATINGS</b>				
Nonrepetitive Peak Surge Current	IFSM	100		Amp
Operating Junction Temperature	Tj	-65 to +125		v
Storage Temperatures	TSTG	-65 to +125		v

Specification apply to die only. Actual performance may degrade when assembled.

MEMT does not guarantee device performance after assembly.

Data sheet information is subjected to change without notice.

**DICE OUTLINE DRAWING**


DIM	ITEM	um <sup>2</sup>	Mil <sup>2</sup>
A	Die Size	1524	60.00
B	Top Metal Pad Size	1424	56.1
C	Passivation Seal	1444	56.9
D	Thickness (Min)	254	10
	Thickness (Max)	305	12

**PS:**

(1)Cutting street width is around 80um(3.14mil).

(2)Both of top-side and back-side metals are Ti/Ni/Ag