



Elektronische Bauelemente

SM320A THRU SM3100A

VOLTAGE 20V ~ 100V

3.0 AMP Surface Mount Schottky Barrier Rectifiers

RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free

FEATURES


- RoHS Compliant Product
- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- Low forward voltage drop

SMA



MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Metallurgically bonded construction
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.093 grams



	Dimensions in Millimeters		Dimensions in Inches	
A	1.25	1.65	0.049	0.065
B	3.99	4.60	0.157	0.181
C	2.50	2.90	0.098	0.114
D	1.98	2.44	0.078	0.096
E	0.051	0.203	0.002	0.008
F	4.78	5.28	0.188	0.208
G	0.76	1.52	0.030	0.060
H	0.152	0.305	0.006	0.012

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
 Single phase half wave, 60Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

TYPE NUMBER	SM320A	SM340A	SM360A	SM3100A	UNITS
Maximum Recurrent Peak Reverse Voltage	20	40	60	100	V
Working Peak Reverse Voltage	20	40	60	100	V
Maximum DC Blocking Voltage	20	40	60	100	V
Maximum Average Forward Rectified Current, See Fig. 1	3.0 A				
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	100 A				
Maximum Instantaneous Forward Voltage at 3.0A	0.45	0.52	0.65	0.83	V
Maximum DC Reverse Current Ta=25 °C	0.2				mA
At Rated DC Blocking Voltage Ta=100 °C	20				
Typical Junction Capacitance (Note 1)	300				pF
Typical Thermal Resistance RθJL (Note 2)	30				°C/W
Operating Temperature Range T _J	- 50 ~ + 150				°C
Storage Temperature Range T _{STG}	- 65 ~ + 175				°C

NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Lead.

● RATING AND CHARACTERISTIC CURVES (SM320A THRU SM3100A)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

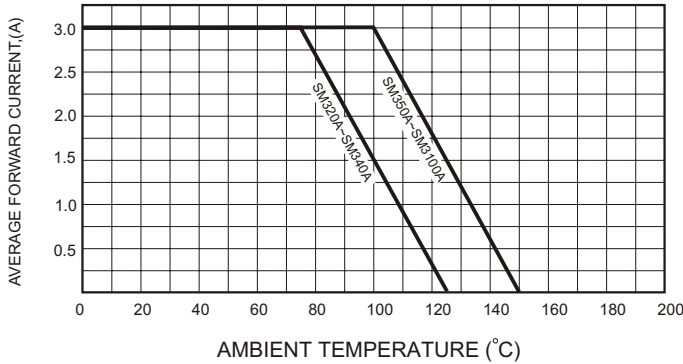


FIG.2-TYPICAL FORWARD CHARACTERISTICS

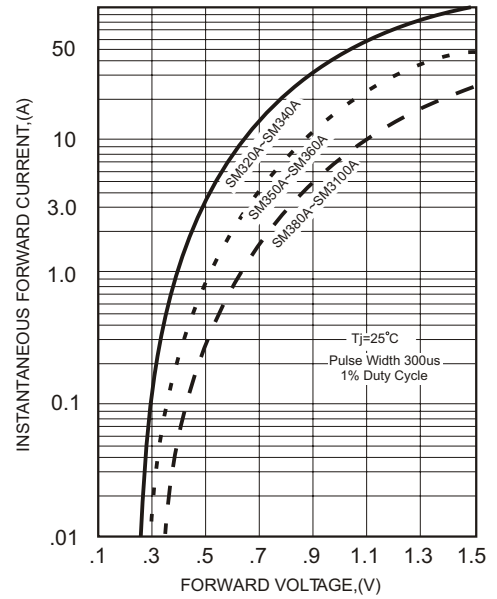


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

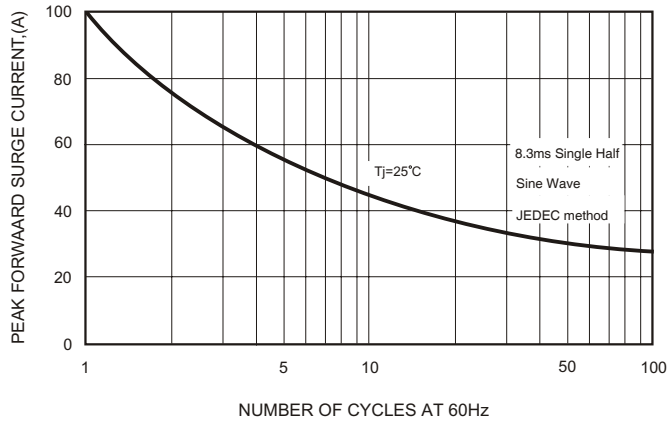


FIG.4-TYPICAL JUNCTION CAPACITANCE

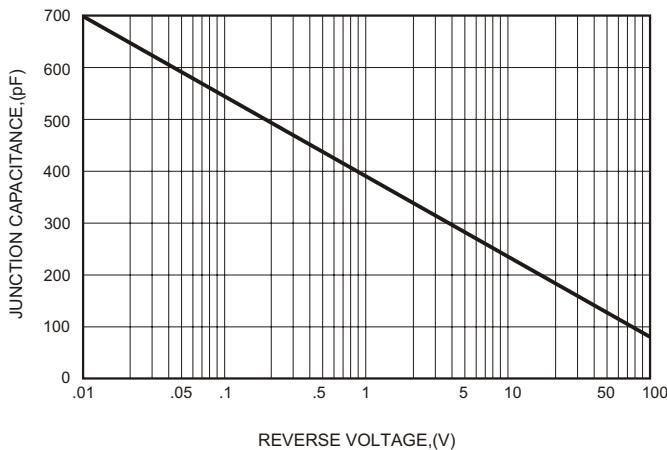


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

