


FEATURES

- Set-Top Box Standard Size.
- Remote-Control Function
- Stand-By Output Provide
- High Efficiency (70%Typ.)
- 90-264Vac Universal Input
- CISPR'B' & CNS'B' Compliance
- Short-Circuit Protection, OVP Installation

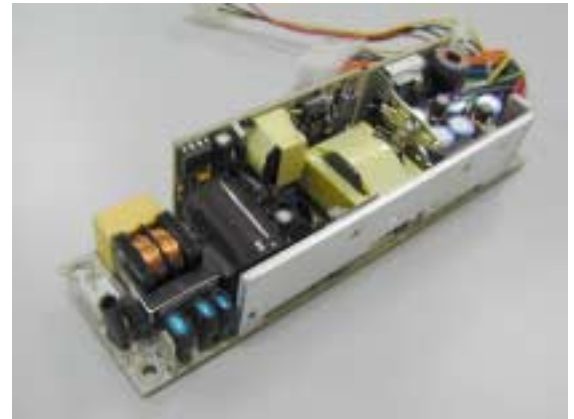


SPECIFICATION

Item	Model	SP20112	SP20112A
Input Voltage		AC 90~264V	
Input Frequency		47~63Hz	
Efficiency		70% Typical	72% Typical
Operating Temperature		0~50°C	
Storage Temperature		-20~85°C	
Weight		260g	
Safety Description		---	

(*) : Under Development (I/P): In Process

MECHANICAL

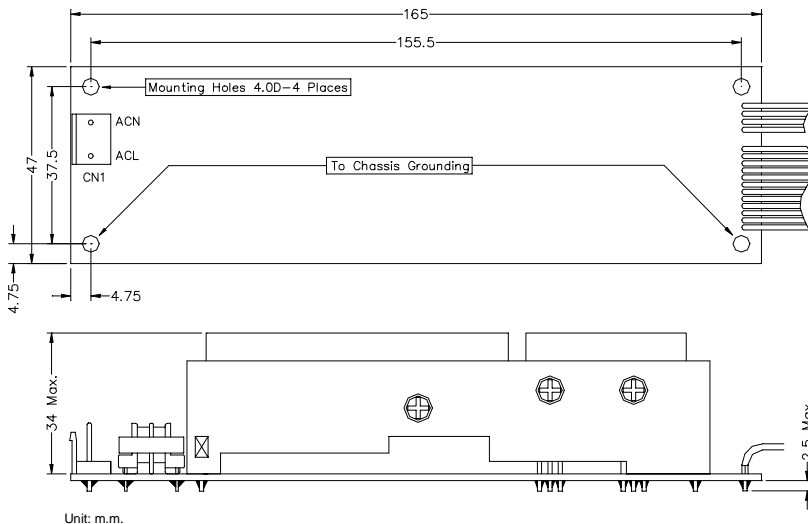

Ref. No.	Connector Type
CN1	JST B3P2-VH or Equivalent

OUTPUTS

Model No.		SP20112				SP20112A				
Vo (V)		Vo1	Vo2	Vo3	Vo4	Vo5	Vo1	Vo2	Vo3	Vo4
		+5	+12	-12	5sb	3.3	+5	+12	-12	5sb
Load (A)	Min	1.2	0.2	0	0	0.4	1.2	0.2	0	0
	Rated	6	1	0.3	0.7	2	6	2	0.3	0.7
	Surge	---	---	---	---	---	---	---	---	---
Regulation (%)	Line	1	1	1	1	1	1	1	1	1
	Load	5	8	5	5	5	5	8	10	5
Tolerance (+/-%)		5	8	10	5	5	5	8	10	5
Ripple/Noise (mV)		50	240	240	50	50	50	240	240	50