

## SR220 THRU SR2200



## 2.0 AMP SC H OTTKY B A R R I E R R E C T I F I E R S



## FEATURES

- \* Low forward voltage drop
- \* High current capability
- \* High reliability
- \* High surge current capability
- \* Epitaxial construction

## MECHANICAL DATA


- \* Case: Molded plastic
- \* Epoxy: UL 94V-0 rate flame retardant
- \* Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- \* Polarity: Color band denotes cathode end
- \* Mounting position: Any
- \* Weight: 0.34 grams
- \* Both normal and Pb free product are available:
- \* Normal: 80~95%Sn, 5~20%Pb
- \* Pb free: 99Sn above can meet RoHS environment substance directive request

## VOLTAGE RANGE

20 to 200 Volts

## CURRENT

2.0 Ampere

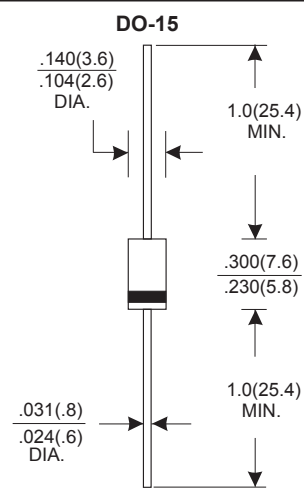

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.  
Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

TYPE NUMBER	SR220	SR240	SR260	SR280	SR2100	SR2150	SR2200	UNITS
Maximum Recurrent Peak Reverse Voltage	20	40	60	80	100	150	200	V
Maximum RMS Voltage	14	28	42	56	70	105	140	V
Maximum DC Blocking Voltage	20	40	60	80	100	150	200	V
Maximum Average Forward Rectified Current	See Fig. 1							A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	2.0							A
Maximum Instantaneous Forward Voltage at 2.0A	0.55	0.70	0.85				V	
Maximum DC Reverse Current at Rated DC Blocking Voltage	Ta=25°C				0.5			mA
Typical Junction Capacitance (Note 1)	Ta=100°C				20			mA
Typical Thermal Resistance RθJA (Note 2)					170			pF
Operating Temperature Range Tj					35			°C/W
Storage Temperature Range Tstg	-65 — +125		-65 — +150					°C
	-65 — +150							°C

## NOTES:

1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Ambient Vertical PC Board Mounting 0.5"(12.7mm) Lead Length.

RATING AND CHARACTERISTIC CURVES (SR220 THRU SR2200)

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

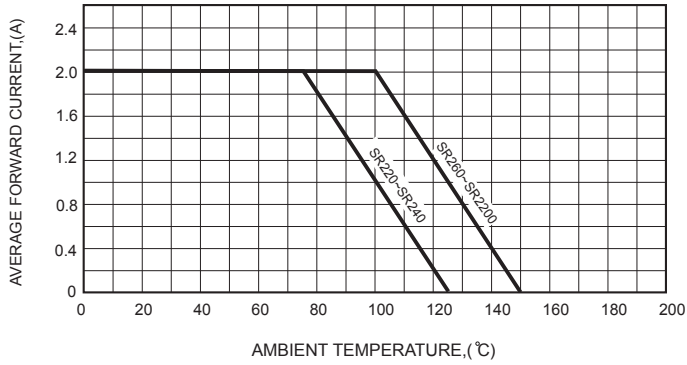


FIG.2-TYPICAL FORWARD CHARACTERISTICS

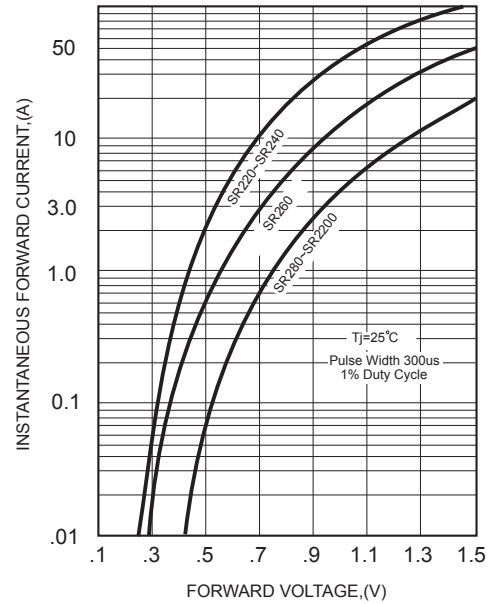


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

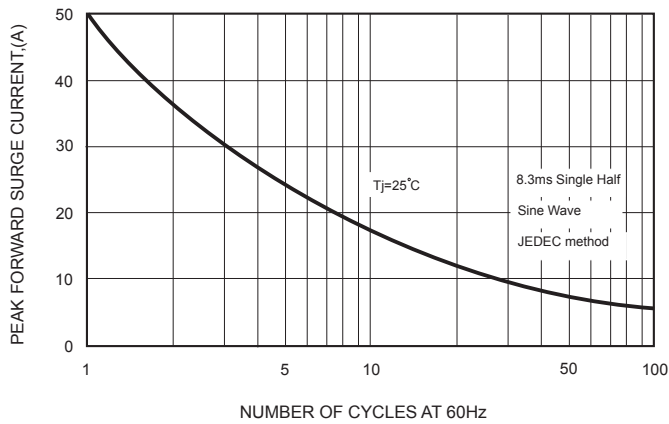


FIG.4-TYPICAL JUNCTION CAPACITANCE

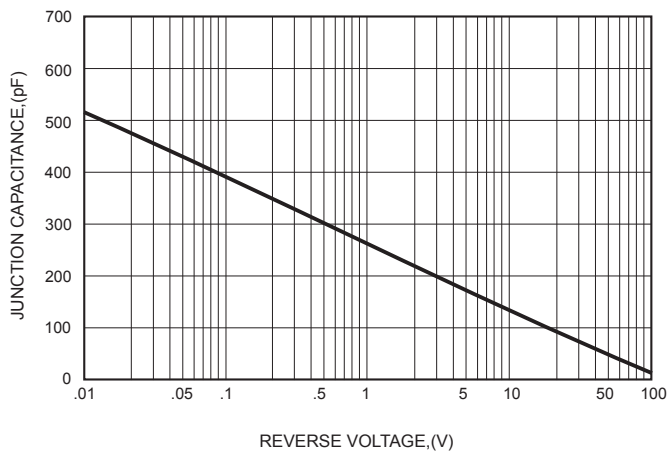


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

