

Schottky Barrier Rectifiers

Using the Schottky Barrier principle with a Refractory metal capable of high temperature operation metal. proprietary barrier technology allows for reliable operation up to 175°C junction temperature. Typical application are in switching Mode Power Supplies such as adaptors, DC/DC converters free-wheeling and polarity protection diodes.

Features

- * Low Forward Voltage.
- * Low Switching noise.
- * High Current Capacity
- * Guarantee Reverse Avalanche.
- * Guard-Ring for Stress Protection.
- * Low Power Loss & High efficiency.
- * 175°C Operating Junction Temperature
- * Low Stored Charge Majority Carrier Conduction.
- * Plastic Material used Carries Underwriters Laboratory Flammability Classification 94V-O
- * Moisture Sensitivity Level: MSL-1



* *In compliance with EU RoHs 2002/95/EC directives*
 The marking is indicated by part no. with. "M". ex:SR5200M

MAXIMUM RATINGS

Characteristic	Symbol	SR5200J	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	200	V
RMS Reverse Voltage	$V_{R(RMS)}$	140	V
Average Rectifier Forward Current	I_O	5.0	A
Non-Repetitive Peak Surge Current (Surge applied at rate load conditions halfwave, single phase, 60Hz)	I_{FSM}	150	A
Operating and Storage Junction Temperature Range	T_J, T_{STG}	-65 to +175	°C

ELECTRICAL CHARACTERISTICS


Characteristic	Symbol	SR5200J	Unit
Maximum Instantaneous Forward Voltage ($I_F = 5.0$ Amp.)	V_F	0.87	V
Maximum Instantaneous Reverse Current (Rated DC Voltage, $T_C = 25^\circ\text{C}$) (Rated DC Voltage, $T_C = 125^\circ\text{C}$)	I_R	0.5 3	μA mA
Maximum Thermal Resistance Junction to case	$R_{\theta JC}$	6.5	°C/W
Typical Junction Capacitance (Reverse Voltage of 4 volts & $f=1$ MHz)	C_P	320	pF

SCHOTTKY BARRIER RECTIFIERS

**5.0 AMPERES
200 VOLTS**



DO-201AD

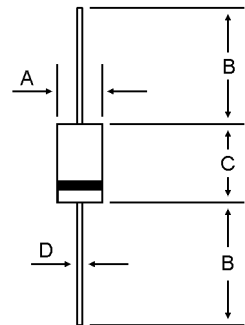

DIM	MILLIMETERS	
	MIN	MAX
A	5.00	5.60
B	25.40	---
C	8.50	9.50
D	1.20	1.30

CASE---
Transfer molded plastic

POLARITY---
Cathode indicated polarity band

SR5200J

FIG-1 FORWARD CURRENT DERATING CURVE

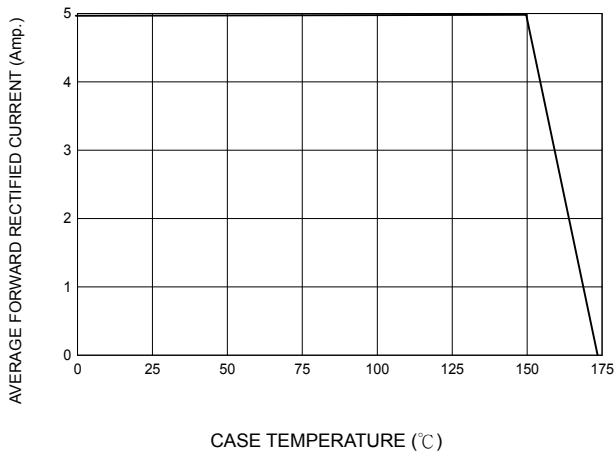


FIG-2 TYPICAL FORWARD CHARACTERISTICS

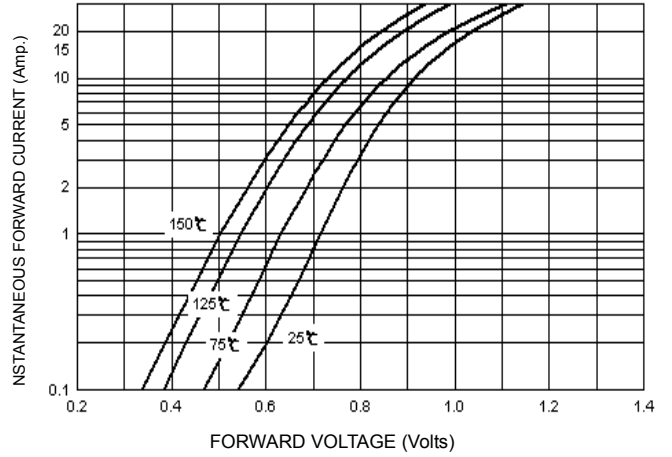


FIG-3 TYPICAL REVERSE CHARACTERISTICS

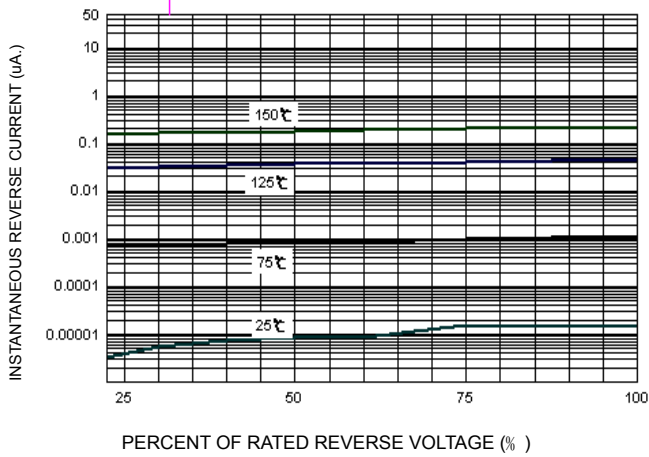


FIG-4 TYPICAL JUNCTION CAPACITANCE

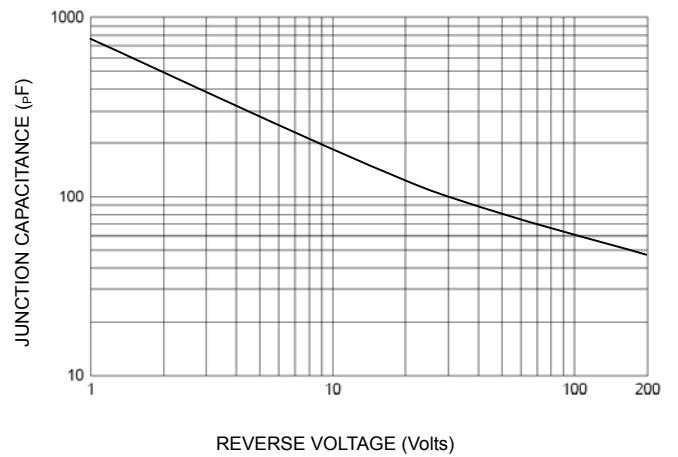


FIG-5 PEAK FORWARD SURGE CURRENT

